


## MAIN FEATURES

- Universal input voltage range (90 – 264 V<sub>AC</sub>)
- 160 W rated power (100 W natural convection cooling)
- Compact standard form factor (2 x 4 x 1 in)
- High efficiency (91% typical)
- 5, 12 or 24 V<sub>DC</sub> standard output voltages
- Active PFC, EN61000-3-2 compliant (Class C, >50% load).
- Low earth / touch leakage current (<100 µA for Class II)
- Class I and Class II protection class variants
- Over temperature protection
- Output over current, short circuit, over voltage protection
- Auxiliary / fan 12 V<sub>DC</sub>, 0.5 A output.
- Medical safety approval to IEC 60601-1 3<sup>rd</sup> edition
- IEC 60601-1-2 4<sup>th</sup> edition EMC compliant (Class II variants)
- RoHS 3 compliant (Directive 2015/863/EU)
- 4000 m altitude operation

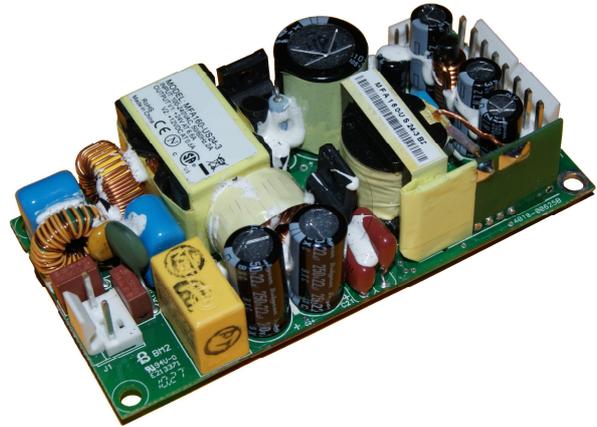

## DESCRIPTION

The MFA160 is a series of high efficiency, small form factor single output AC-DC medical approved power supplies.

The 5V variant comes as IEC Class II and operator protection (MoOP), the 12V variant comes as IEC Class I and operator protection (MoOP), the 24V variant is available as Class I or Class II IEC installation classes, MoOP or MoPP protection degree and as pollution degree 2.

The series provide a steady 160 W of regulated DC power from an open-frame 2 x 4 x 1" standard form factor which makes easier its integration into space constrained systems.

By converting energy at 91% typical efficiency, the series generate less heat which facilitating thermal management into a system. The series comes in 5, 12 or 24 V<sub>DC</sub> standard output voltages and offers an auxiliary 12 V<sub>DC</sub>, 0.5 A output. It can deliver full output power from -20 to 50 °C at 500 LFM airflow and can be operated up to 70 °C applying output power derating. When natural convection cooled, the 12, 24V variants can deliver a steady 100 W, and the 5V, 70 W up to 50 °C ambient.

All MFA160 variants can be operated up to 4000 m without de-rating thanks to PCB Creepage and clearance greater than 8 mm. Protection features include fuses on both AC lines, output over-current, short-circuit, output over-voltage and over-temperature.

The MFA160 series comply with the 3<sup>rd</sup> edition of the IEC/EN 60601-1 and ANSI/AAMI ES60601-1 safety standards for medical equipment. It meets the EN 60601-1-2 EMC limits of Class B for conducted emissions, the IEC/EN 61000-3 for harmonic content and EN 55011 / EN 60601-2 4<sup>th</sup> edition for EMC immunity.

## MARKET SEGMENTS AND APPLICATIONS

- Class I / Class II medical equipment
- Portable / Home health care equipment
- Laboratory / Analysis Equipment
- Electromagnetic / Laser aesthetical appliances

## MODEL CODING AND OUTPUT RATINGS

MFA	160	-USxx	-2 / -3	PP
Medical grade	160 W Rated Power	Output voltages: 5, 12, 24 V <sub>DC</sub>	Class II installation	2xMoPP Patient protection

Available Model Numbers	V1 [V]	I1 <sup>1</sup> Convection [A]	I1 <sup>1</sup> Forced air [A]	V1 <sup>2</sup> Ripple [mV]	V2 [V]	I2 <sup>1</sup> Rated [A]	V2 <sup>2</sup> Ripple [mV]
MFA160-US05-2	5	14	20	50	12	0.5	240
MFA160-US12	12	8.3	13.3	120	12	0.5	240
MFA160-US24	24	4.1	6.6	240	12	0.5	240
MFA160-US24-3 PP	24	4.1	6.6	240	12	0.5	240

<sup>1</sup> The combined output power of V1 and V2 must not exceed 70 W for the 5V and 100 W for the other variants, when natural convection cooled, up to 50 °C ambient. The combined output power of V1 and V2 must not exceed 100 W for the 5V and 160 W for other variants when forced air cooled at 500 LFM, up to 50 °C ambient. In both convection or forced air cooling de-rating applies above 50 °C ambient (see output power – ambient temperature graphs below).

<sup>2</sup> Peak-to-Peak measured at 20 MHz Bandwidth.


## INPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
AC Input Voltage	PS starts and operates at 90 V <sub>AC</sub> at all load conditions	90	100/240	264	V <sub>AC</sub>
Input Frequency		47	50/60	63	Hz
DC Input Voltage		170	-	300	V <sub>DC</sub>
Input Current	RMS at 90 V <sub>AC</sub> , maximum load	-	-	2.3	A
Inrush Current (peak)	No damage at 230 V <sub>AC</sub> , cold start/hot start.	-	-	-	-
Fusing	2.5 A, Time Lag, 250 V on L and N	-	2.5	-	A
Efficiency	115 V <sub>AC</sub> , full load (12, 24, 48 V)	-	90	-	%
	230 V <sub>AC</sub> , full load (12, 24, 48 V)	-	91	-	%
No load Power Consumption	115 V <sub>AC</sub>	-	2.5	-	W
	230 V <sub>AC</sub>	-	2.3	-	W
Power Factor	At full rated load,				
	115 V <sub>AC</sub> , 60 Hz	0.98	-	-	
	230 V <sub>AC</sub> , 50 Hz	0.89	-	-	
Harmonic Current	Complies with EN-61000-3-2 Class D at 230 V <sub>AC</sub> 50 Hz.				
Fluctuations and Flicker	Complies with EN-61000-3-3 at nominal voltages and full load.				
Earth Leakage Current	264 V <sub>AC</sub> , 60 Hz, normal condition, Class II	-	-	100	μA
	264 V <sub>AC</sub> , 60 Hz, normal condition, Class I	-	-	200	μA

## OUTPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nom.	Max.	Units
V1 Set Point Accuracy			±1	-	%
V1 Output Power Rating	Natural convection 500 LFM forced air	-	-	100 160	W
V2 Output Voltage	15% accuracy	10.2	12	13.8	V
V2 Output Current		-	-	0.5	A
V1 Voltage Adjustment Range		-	-	±5	%V1
Load Regulation	V <sub>AC</sub> : nominal voltages				
	V1 Load: 0 – 100% rated	-	-	±1	%V1
	V2 Load: 0 – 0.5 A	-	-	±5	%V2
Load-Line Cross Regulation	V <sub>AC</sub> : 90 – 264 V <sub>RMS</sub>				
	V1: 0 – 100% load (V2 at 50% load)	-	-	±1	%V1
	V2: 0 – 0.5 A load (V1 at 50% load)	-	-	±15	%V2
V1 Line Regulation	V <sub>AC</sub> : 90 – 264 V <sub>RMS</sub>	-	-	±0.1	%V1
V1 Transient Response (Voltage Deviation)	50% load changes at 0.1 A/μs Recovery to regulation band within 1 ms	-	-	10	%V1
V1 Ripple and Noise	Peak-to-peak, 20 MHz BW.	-	-	1	%V1
Start-up Rise Time	90 < V <sub>IN</sub> < 264, any load conditions.	0.2	-	5	ms
Start-up Delay	V1 in regulation after AC is applied	-	-	1000	ms
Turn-on Overshoot		-	10	-	%V1
Hold-up Time	At nominal V <sub>IN</sub> , rated load, all models	16	-	-	ms
Minimum Load	V1, V2	0	-	-	A
Temperature Drift		-	±0.25	-	mV/°C

Output Power De-rating vs Ambient temperature. V<sub>IN</sub>: 100 – 264 V<sub>RMS</sub>

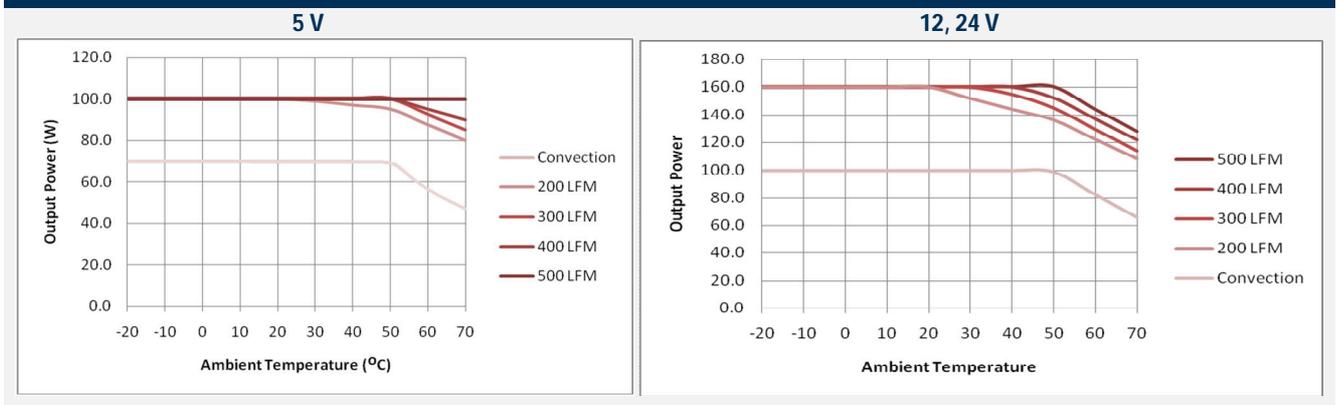

## PROTECTION FEATURES

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
Input Fuse	Time Lag 2.5 A, 250 V on L and N				
Over Current	Hiccup mode, auto-recovery	110	-	150	%I <sub>MAX</sub>
Short Circuit	Hiccup mode, auto-recovery				
Over Voltage	Shut down, latch off mode	110	-	130	%V <sub>NOM</sub>
Over Temperature	Shut-down, auto-recovery				
	I-to-O, Reinforced (-PP)	4000	-	-	V <sub>AC</sub>
	V1-to-V2	100	-	-	V <sub>AC</sub>
	I-to-PE (Class I), (-PP)	1500	-	-	V <sub>AC</sub>
Isolation	O-to-PE (Class I), functional	500	-	-	V <sub>DC</sub>
Creepage and Clearance		8	-	-	mm

## ENVIRONMENTAL SPECIFICATIONS

Specification	Test Conditions / Notes	Min	Nominal	Max	Units
Operating Temperature <sup>3</sup>	No de-rating up to 50°C, 50% load at 70°C Linearly de-rate above 50 °C	-20	-	70	°C
Storage Temperature Range		-40	-	80	°C
Cooling <sup>3</sup>	5V: above 70 W output Other variants: above 100 W Output	200	-	500	LFM
Relative Humidity	Non-condensing	-	-	95	%
Operating Altitude		-	-	4000	m
Shock	<b>EN 60068-2-27</b> Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative).				
Vibration	<b>EN 60068-2-64</b> Operating: Sine, 10 – 500 Hz, 1 g, 3 axes, 1 oct/min., 60 min. Random, 5 – 500 Hz, 0.02 g <sup>2</sup> /Hz, 1 g <sub>RMS</sub> , 3 axes, 30 min. Non-Operating: 5 – 500 Hz, 2.46 g <sub>RMS</sub> (0.0122 g <sup>2</sup> /Hz), 3 axes, 30 min.				
Pollution Degree	PD 2				
MTBF	>200.000 hours (5V variant) at 75% Full Load, Nominal V <sub>AC</sub> , 25 °C ambient MIL-HDBK-217-E-1				
Life Time	At 100 W, natural convection, 40 °C ambient, nominal V <sub>IN</sub> , 100% duty cycle (IPC 9592)	-	5	-	Years

<sup>3</sup> See de-rating curves below

## ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

Phenomenon	Conditions / Notes	Standard	Equipment/Performance Class
Conducted	115 V <sub>RMS</sub> , 230 V <sub>RMS</sub> . Maximum load.	EN 60601-1-2	B
Radiated	At 10 m distance	EN 60601-1-2	A
Line Voltage Fluctuation and Flicker	At 20%, 50% and 100% maximum load. Nominal input voltages.	EN 61000-3-3	
Harmonic Current Emission	Nominal input voltages. All load conditions.	EN 61000-3-2	D

## ELECTROMAGNETIC COMPATIBILITY (EMC) – IMMUNITY

Phenomenon	Conditions / Notes	Standard	Test Level	Performance criteria
	<b>Reference standard for the medical version</b>		<b>EN 60601-1-2, 4<sup>th</sup> Edition</b>	
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A
Radiated Field	3 V/m, 80-1000 MHz, 80% AM, 3 m distance	EN 61000-4-3	3	A
Electric Fast Transient	±2 kV on AC power port ±1 kV on signal/control lines	EN 61000-4-4	3	A
Surge	±1 kV line-to-line ±2 kV line to earth ±0.5 kV for outdoor cables	EN 61000-4-5	3	A
Conducted RF Immunity	3 V <sub>RMS</sub> , 0,15-80 MHz, 80% AM	EN 61000-4-6	3	A
Magnetic Field Immunity	50 and 60 Hz, 3 A/m			
Dips and Interruptions	<b>At 100 V<sub>AC</sub></b> 100% dip (0 V <sub>AC</sub> ) for 10 ms 100% dip (0 V <sub>AC</sub> ) for 20 ms 60% dip (40 V <sub>AC</sub> ) for 100 ms 30% dip (70 V <sub>AC</sub> ) for 500 ms 100% dip (0 V <sub>AC</sub> ) for 5000 ms	EN61000-4-11		A A B A B
	<b>At 240 V<sub>AC</sub></b> 100% dip (0 V <sub>AC</sub> ) for 10 ms 100% dip (0 V <sub>AC</sub> ) for 20 ms 60% dip (96 V <sub>AC</sub> ) for 100 ms 30% dip (168 V <sub>AC</sub> ) for 500 ms 100% dip (0 V <sub>AC</sub> ) for 5000 ms	EN61000-4-11		A A A A B


## SAFETY AGENCIES APPROVALS

Certification Body	Safety standards and file numbers	Agency files references
UL / CSA	ANSI AAMI ES60601-1:2005/(R)2012 and A1:2012, C1:2009/(R)2012 and A2:2010/(R)2012 CAN/CSA C22.2 NO. 60601-1:14 (R2018)	Ask Enedo for reference
IEC IEC CB Certification	IEC 60601-1 edition 3.1 2012	Ask Enedo for reference
CE	Directive 93/42/CEE: Safety Requirements of Medical Devices Low Voltage Directive (LVD) 2014/35/EU Electro-magnetic Compatibility (EMC) 2014/30/EU RoHS 3 Directive 2015/863/EU	

## OUTLINE DRAWING, CONNECTIONS AND OUTPUT POWER DE-RATING

Overall dimensions: 50.8 x 101.6 x 27.5 mm (2.00 x 4.00 x 1.08 in)

Weight: 160 g (0.35 lb)

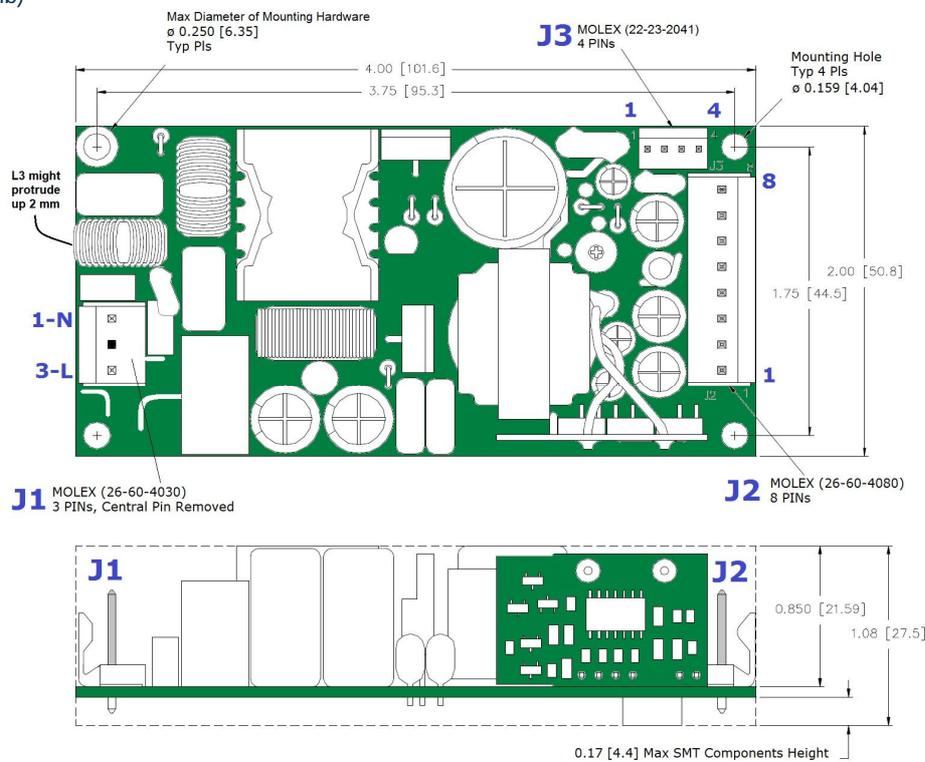

**Forced air cooling: Air flow direction, longitudinal or transverse, must be coplanar to the PCB no matter its orientation.**

Connector	Manufacturer and Part Number	Pin Assignment
AC Input Connector J1	Molex 26-60-4030 or equivalent	1: AC Line 1; 2: Not present; 3: AC Line 2
J1 Mating Connector	Molex 09-93-0300 (Crimp Terminal Housing) Molex 08-50-0105 (Crimp Terminal, 18-24 AWG)	
Output Connector J2	Molex 26-60-4080 or equivalent	1 ÷ 4: V1 RTN; 5 ÷ 8: +V1
J2 Mating Connector	Molex 09-91-0800 (Crimp Terminal Housing) Molex 08-50-0105 (Crimp Terminal, 18-24 AWG)	
Auxiliary Connector J3	Molex 22-23-2041 or equivalent	1, 2: V2 RTN; 3, 4: +V2
J3 Mating Connector	Molex 22-01-2047 (Crimp Terminal Housing) Molex 08-50-0113 (Crimp Terminal, 22-24 AWG)	

Specifications appearing in ENEDO's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by ENEDO are as accurate as possible but, being given for general information, and are not binding on ENEDO. ENEDO makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. ENEDO assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.