

OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

SGD

GK-L, \$BB87% 0

SG-01-0F1



| Product Specification | | | | |
|---|----------------------|----------|---------------|--------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 1 / 24 |

Thin-Film-Transistor LCD Module
Model: GKIX80NNDC1F0

| Acceptance |
|------------|
| |

Solomon Goldentek Display Corp.
NO. 18 Ta-Yeh St., Ta-Fa Industrial Park, Ta-Liao
Hsiang, Kaohsiung Hsien 831, TAIWAN , R.O.C.
FAX: 886-7-7886800

| Approved and Checked by |
|-------------------------|
| |


| Approved by | Checked by | | Made by |
|---|------------|--|---|
|  | | |  |

| Product Specification | | | |
|---|----------------------|----------|---------------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. |
| | | A | 2016, Jan. 06 |
| | | | Page. |
| | | | 3 / 24 |

Contents

| | | |
|-----------|---|----|
| 1. | General Description and Features | 4 |
| 1.1 | Features | 4 |
| 1.2 | LCD Module | 4 |
| 2. | Mechanical Information | 4 |
| 3. | Electrical Specifications | 5 |
| 3.1 | Absolute Max. Ratings | 5 |
| 3.2 | Timing Characteristics | 8 |
| 3.3 | Back-Light Unit | 12 |
| 4. | Optical Characteristics | 13 |
| 4.1 | Optical characteristic of the LCD | 13 |
| 5. | I/O Terminal | 16 |
| 5.1 | Pin Assignment (connector part No: MSB24013P20HA or equivalent.) | 16 |
| 5.2 | Back Light Unit (Connector Part No: JST:BHSR-02VS-01(N) or equivalent.) | 17 |
| 5.3 | Block Diagram | 17 |
| 6. | Displayed Color and Input Data | 18 |
| 7. | Reliability Condition | 19 |
| 8. | Dimensional Outlines | 20 |
| 9. | Incoming Inspection Standards | 21 |

Product Specification

| | | | | |
|---|----------------------|----------|---------------|--------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 4 / 24 |

1. General Description and Features

GKIX80NNDC1F0 is a Normally block TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT-LCD module, a receiver circuit and a back-light unit. Graphics and texts can be displayed on a XGA 1024 (W) x RGB x 768 (H) dots (4:3 aspect ratio) with 16.7M colors. The following table described the features of GKIX80NNDC1F0.

1.1 Features

- Normally block and back-light with 28 LEDs are available.
- IPS
- LVDS Receiver 6/8 bit Interface
- ROHS Compliance

1.2 LCD Module


| Item | Specification | Unit |
|--------------------|---------------------------------|----------|
| Screen Size | 8.0 inches | Diagonal |
| Display Resolution | 1024(H) x 768 (V) | Pixel |
| Active Area | 162.048 (H) x 121.536 (V) | mm |
| Outline Dimension | 183 (H) x 141 (V) x 5.8 (T) | mm |
| Display Mode | Normally block | -- |
| Pixel Arrangement | R,G,B Vertical Stripe | -- |
| Dot pitch | 0.05275 x 0.15825 | mm |
| Surface Treatment | Anti-Glare and Hard Coating(3H) | |
| Display Color | 262K/16.7M | -- |
| Viewing Direction | FREE | -- |
| Input Interface | LVDS Receiver 6/8 bit Interface | -- |

2. Mechanical Information

| Item | | Min. | Typ. | Max. | Unit | Note |
|-------------|----------------|------|-------|------|------|------|
| Module Size | Horizontal (H) | -- | 183 | -- | mm | |
| | Vertical (V) | -- | 141 | -- | mm | |
| | Thickness (T) | -- | 5.8 | -- | mm | (1) |
| Weight | | -- | (250) | -- | g | -- |

Note (1) Not Include Component. Refer to the Outline Dimension Drawing as attached.

Product Specification

| | | | | |
|---|----------------------|----------|---------------|--------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 5 / 24 |

3. Electrical Specifications

3.1 Absolute Max. Ratings

3.1.1 Absolute Ratings of Environment

If the operating condition exceeds the following absolute maximum ratings, the TFT LCD module may be damaged permanently.

(Ta=25±2°C, V_{SS}=GND=0)

| Item | Symbol | Min. | Max. | Unit | Note |
|-----------------------|------------------|------|------|------|---------|
| Storage temperature | T _{STG} | -20 | 60 | °C | (1) |
| Operating temperature | T _{OPR} | -10 | 50 | °C | (1,2,3) |

Note (1) 95 % RH Max. (40 °C ≥ Ta). Maximum wet-bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

Note (2) In case of below 0°, the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one. Level of retardation depends on temperature, because of LC's character

Note (3) Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at +25°C.

3.1.2 Electrical Absolute Maximum Ratings

3.1.2.1 TFT-LCD Module

(V_{SS}=GND=0)


| Parameter | Symbol | Min. | Max. | Unit | Remark |
|----------------------|----------------------------------|------|------|------|--------|
| Power supply voltage | V _{CC} | -0.3 | 5.0 | V | |
| | AV _{DD} | 6.5 | 13.5 | V | -- |
| | V _{GH} | -0.3 | 40 | V | |
| | V _{GL} | -20 | 0.3 | V | |
| | V _{GH} -V _{GL} | - | 40 | V | |

3.1.2.2 Backlight Unit

(V_{SS}=GND=0)

| Parameter | Symbol | Min. | Max. | Unit | Remark |
|---------------------------|--------|------|------|------|--------|
| Current of Backlight Unit | IB | -- | 120 | mA | |
| Voltage of Backlight Unit | VB | -- | 23.1 | V | |

Product Specification

| | | | | |
|---|----------------------|----------|---------------|--------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 6 / 24 |

3.1.3 DC Electrical Characteristics of the TFT LCD

($T_a=25\pm 2^{\circ}\text{C}$, $V_{SS}=\text{GND}=0$)

| Item | Symbol | Min. | Typ. | Max. | Unit | Remark |
|--------------------------|----------|-------------|-------|-------------|------|--------|
| Power supply | V_{CC} | 3.0 | 3.3 | 3.6 | V | Note 1 |
| Input logic high voltage | V_{IH} | $0.7V_{CC}$ | - | V_{CC} | | |
| Input logic low voltage | V_{IL} | 0 | - | $0.3V_{CC}$ | | Note 2 |
| Power Supply current | I_{CC} | - | (220) | (250) | mA | Note 3 |

Note1: VCC setting should match the signals output voltage (refer to Note 2) of customer' s system board

Note2 Typical Vcom is only a reference value, it must be optimized according to each LCM, please use VR and

base on below application circuit

Note3 RESET, STBYB, SELB, L/R, U/D, CABCE0, CABCE1

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.

Page.


A

2016, Jan. 06


7 / 24

3.1.4 Power Signal sequence

Power On

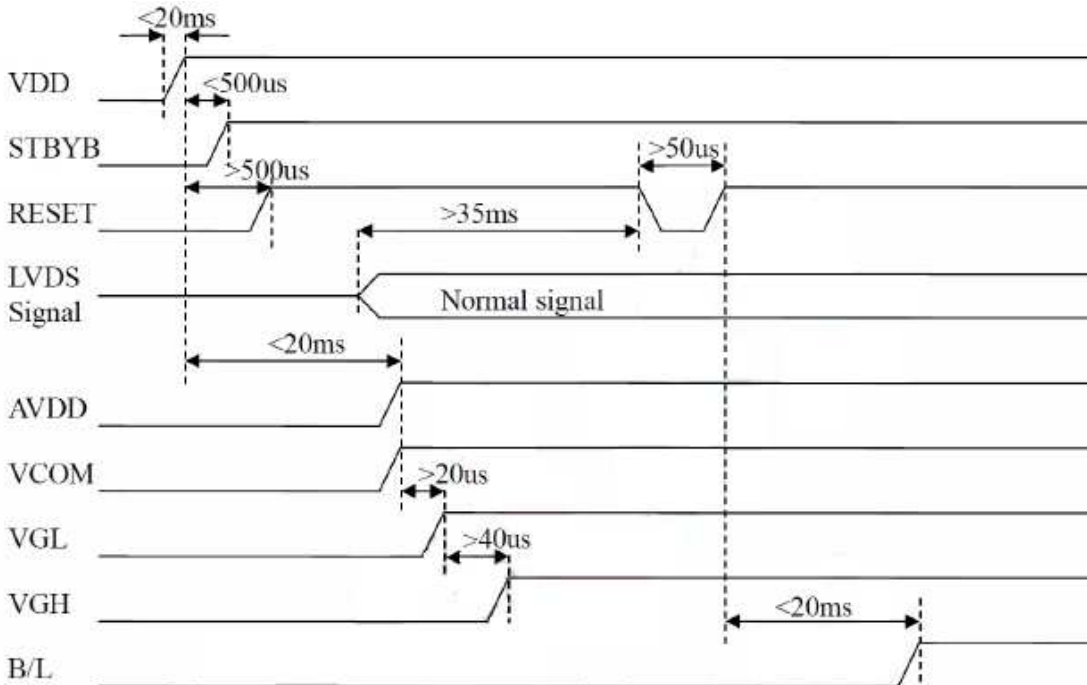

Power Off

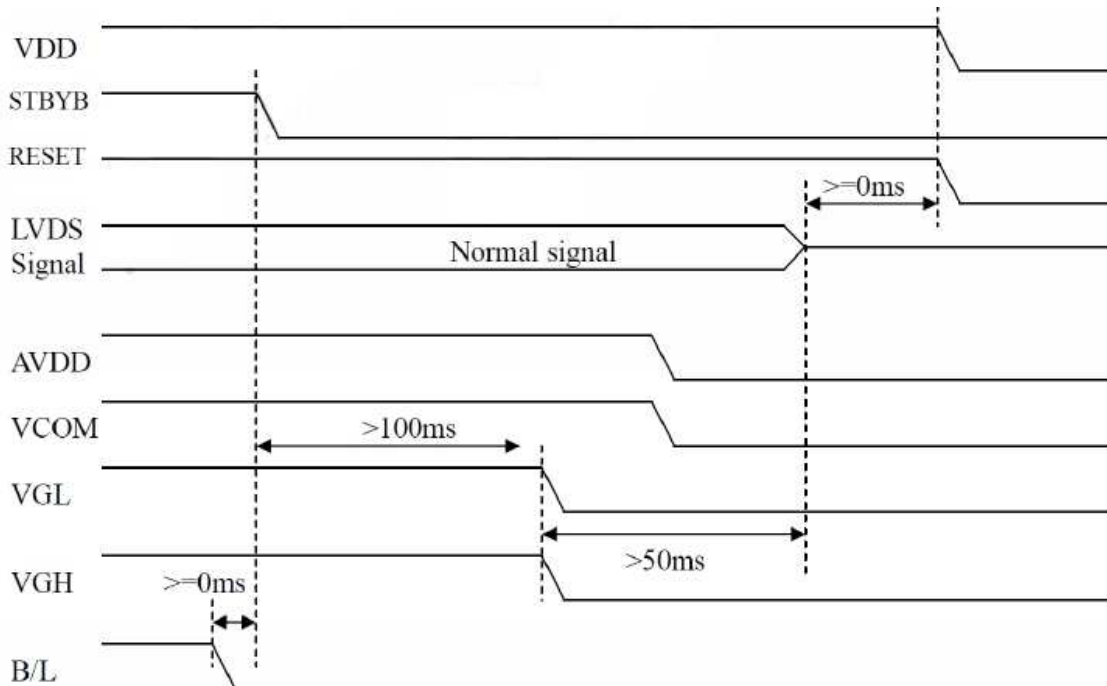

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.

Page.

A

2016, Jan. 06


8 / 24

3.2 Timing Characteristics

3.2.1 AC Electrical Characteristics

| Parameter | Symbol | Values | | | Unit. | Remark |
|------------------------|-------------|--------|---------------------|------|-------|--------|
| | | Min. | Typ. | Max. | | |
| Clock Frequency | R_{XFCLK} | 20 | -- | 71 | MHz | -- |
| Input data skew margin | T_{RSKM} | 500 | -- | -- | Ps | -- |
| Clock high time | T_{LVCH} | -- | $4/(7 * R_{XFCLK})$ | -- | Ns | -- |
| Clock low time | T_{LVCL} | -- | $3/(7 * R_{XFCLK})$ | -- | ns | -- |

3.2.2 Input Clock and Data Timing Diagram

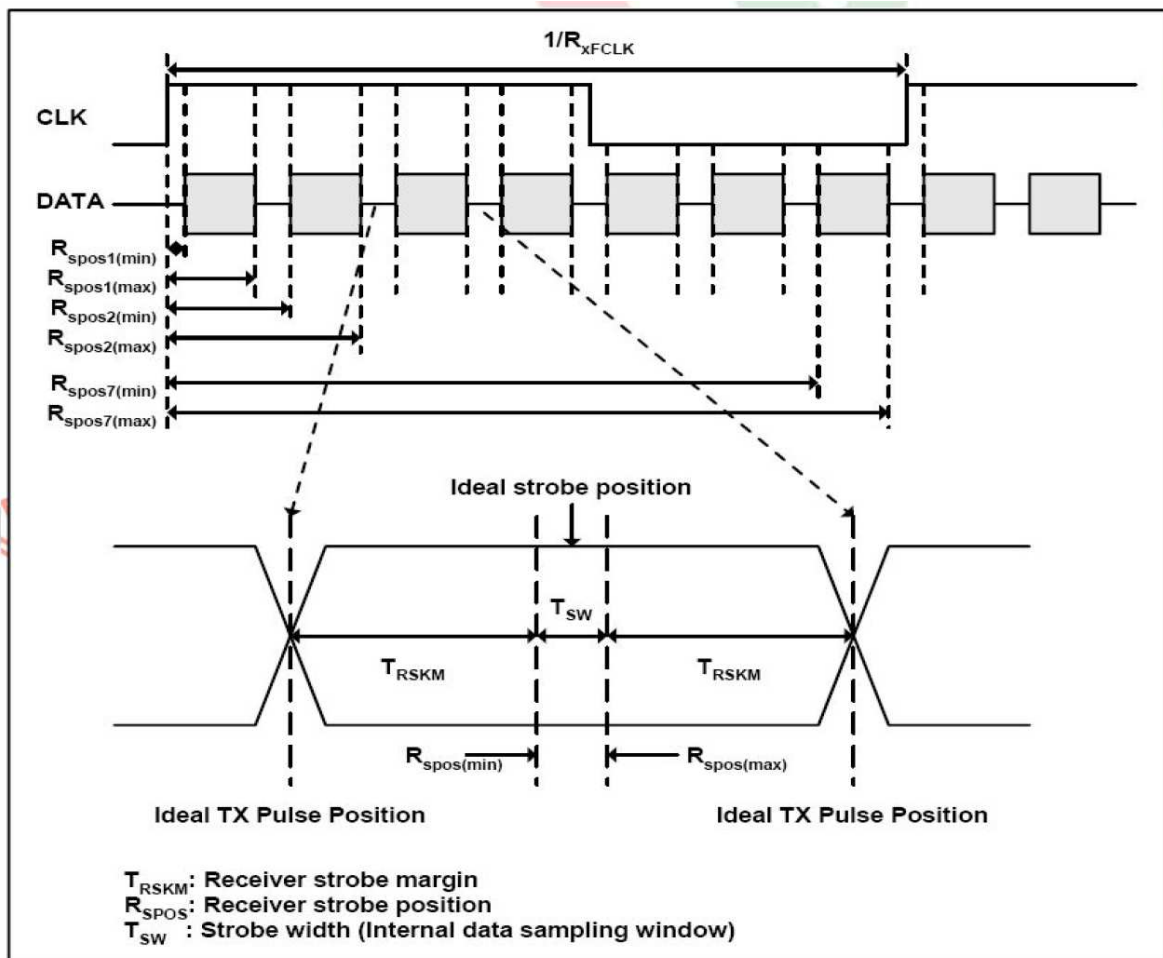

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.

Page.


A

2016, Jan. 06


9 / 24

3.2.3 DC Electrical Characteristics

| Parameter | Symbol | Values | | | Unit. | Remark |
|---|------------|-----------|------|---------------|---------|-----------------|
| | | Min. | Typ. | Max. | | |
| Differential input high Threshold voltage | R_{xVTH} | -- | -- | +0.1 | V | $R_{xVCM}=1.2V$ |
| Differential input low Threshold voltage | R_{xVTL} | -0.1 | -- | -- | V | |
| Input voltage range (singled-end) | R_{xVIN} | 0 | -- | 2.4 | V | -- |
| Differential input common mode voltage | R_{xVCM} | $ VID /2$ | -- | $2.4- VID /2$ | V | -- |
| Differential voltage | $ VID $ | 0.2 | -- | 0.6 | V | -- |
| Differential input leakage current | R_{VxIz} | -10 | -- | +10 | μA | -- |

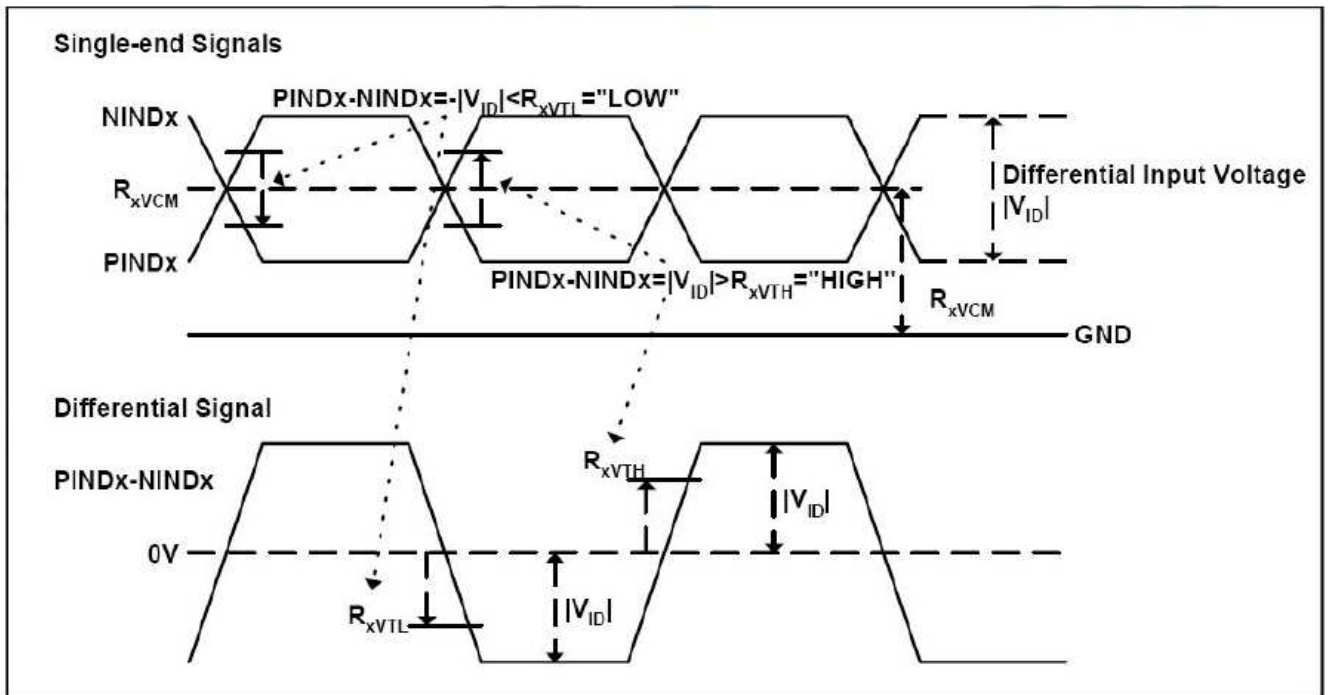


Product Specification

| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 10 / 24 |

3.2.4 Timing

| Item | Symbol | Min. | Typ. | Max. | Unit. | Remark |
|-------------------------|------------------|------|------|------|-------|--------|
| Clock Frequency | f_{clk} | 52 | 65 | 71 | MHz | |
| Horizontal display area | t_{hd} | 1024 | | | DCLK | |
| HS period time | T_h | 1114 | 1344 | 1400 | DCLK | |
| HS Blanking | $T_{hb}+t_{hfp}$ | 90 | 320 | 376 | DCLK | |
| Vertical display area | T_{vd} | 768 | | | H | |
| VS period time | t_{vd} | 778 | 806 | 845 | H | |
| VS Blanking | $T_{vb}+t_{vfp}$ | 10 | 38 | 77 | H | |

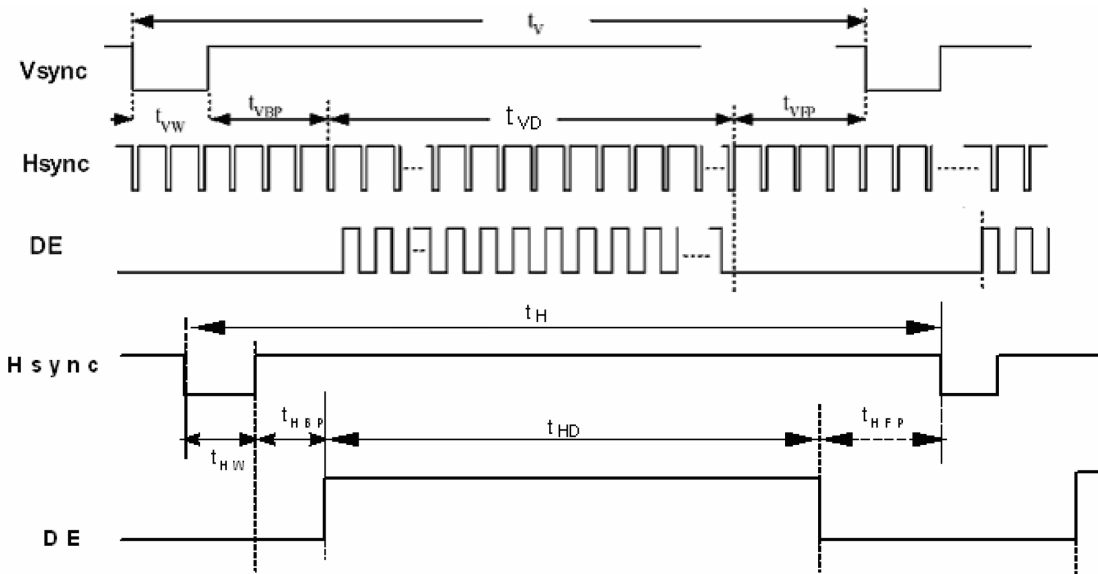

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.

Page.


A

2016, Jan. 06


11 / 24

Data input Format

6bit LVDS input

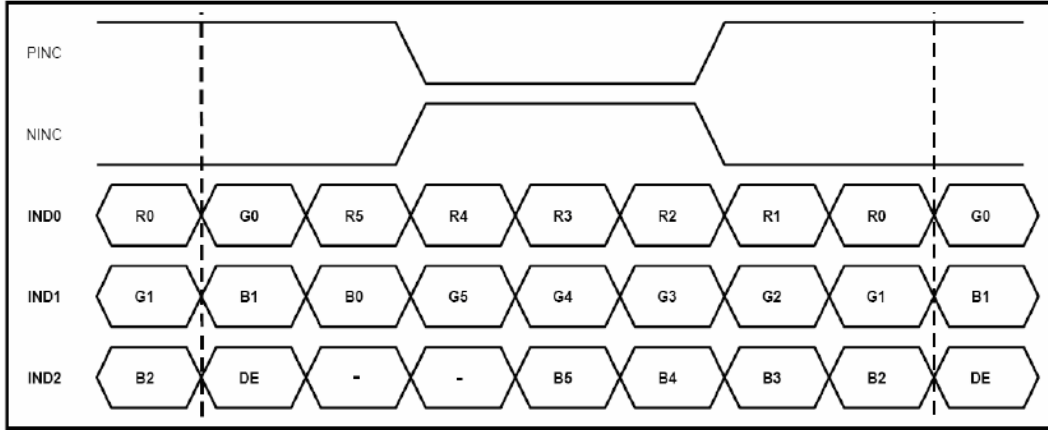


8bit LVDS input

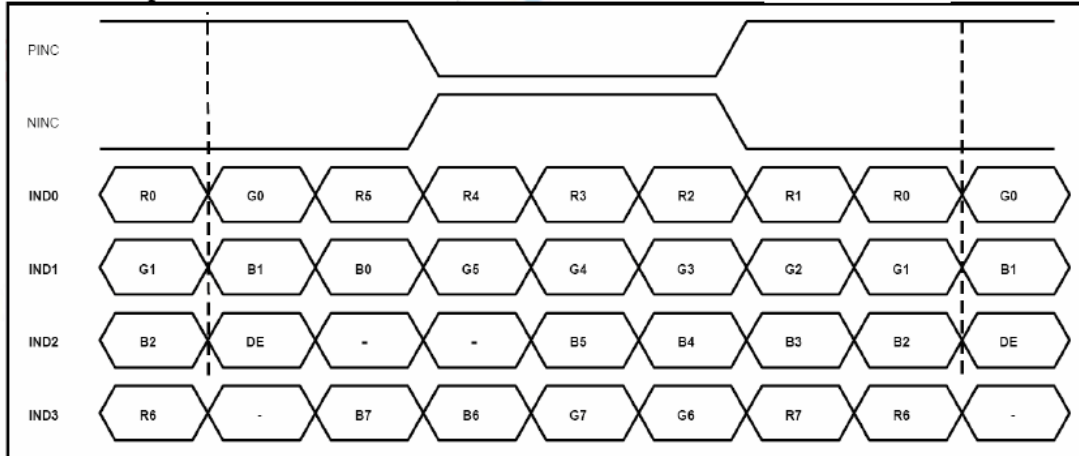

Note: Support DE timing mode only, SYNC mode not supported.

Product Specification

| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 12 / 24 |

3.3 Back-Light Unit

The Back-light system is an edge-lighting type with 28 white LED (Light Emitting Diode)s. The characteristics of 28 white LEDs are shown in the following tables.

(Ta= Room Temp)


| Characteristics | Symbol | Min. | Typ. | Max. | Unit | Note |
|-------------------|-----------------|---------|-------|------|------|------|
| Forward Voltage | VB | 21 | 23.1 | 24.5 | V | |
| Forward Current | IB | - | 120 | - | mA | (1) |
| Power Consumption | P _{BL} | - | 2.772 | - | W | (2) |
| LED life time | - | (40000) | - | - | hr | (3) |

Note (1) LEDs in 7series x 4 parallel type.

(2) Where $IB = 120\text{mA}$, $VB = 23.1$, $P_{BL} = VB \times IB$

(3) The environmental conducted under ambient air flow ,at $Ta=25\pm 2^{\circ}\text{C}$, $60\%RH\pm 5\%$

Product Specification

| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 13 / 24 |

4. Optical Characteristics


4.1 Optical characteristic of the LCD

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods.

Measuring equipment: BM-7A

| Item | Symbol | Condition | Min | Type | Max | Unit | Note |
|-------------------------------|----------------|----------------------------|---------|---------|---------|-------------------|--------|
| Brightness | B | | (350) | (400) | -- | cd/m ² | |
| Response time | T _r | θ=0° | -- | 10 | 20 | ms | . |
| | T _f | | -- | 20 | 30 | ms | |
| Contrast ratio | CR | At optimized viewing angle | 600 | 800 | -- | -- | |
| Luminance Uniformity | ΔL | | 70 | 75 | | % | |
| Color Chromaticity (CIE 1931) | White | W _x | (0.260) | (0.310) | (0.360) | -- | BM-7A |
| | | W _y | (0.280) | (0.330) | (0.380) | | |
| Viewing Angle (6H) | Hor. | θ _R | CR≥10 | 75 | 85 | -- | Degree |
| | | θ _L | | 75 | 85 | -- | |
| | Ver. | θ _U | | 75 | 85 | -- | |
| | | θ _D | | 75 | 85 | -- | |

Product Specification


| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 14 / 24 |

a. Test equipment setup

After stabilizing and leaving the panel alone shall be warmed up for the stable operation of LCM, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7(fast) with a viewing angle of 2° at a distance of 50cm and normal direction.

b. Definition of response time: Tr and Tf

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

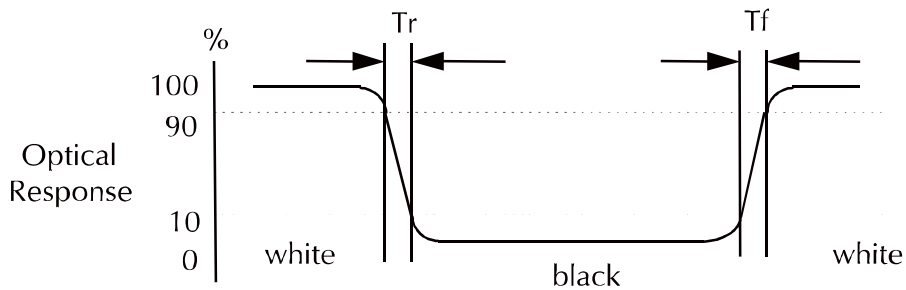

c. Definition of contrast ratio:

$$\text{Contrast Ratio (CR)} = \frac{\text{Brightness measured when LCD is at "white state"}}{\text{Brightness measured when LCD is at "black state"}}$$

d. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.


Page.

A

2016, Jan. 06

15 / 24

e. View Angle

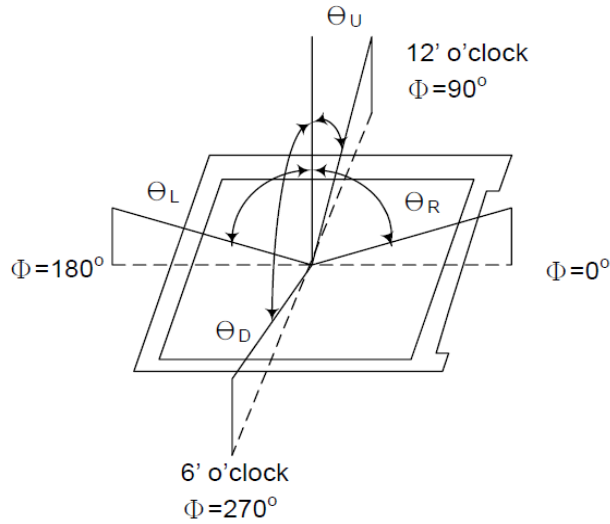

f. Definition of Luminance of White: Luminance of white at the center points

| | |
|---------------------------------|----------|
| Light Source of Back-Light Unit | LED Type |
|---------------------------------|----------|

g. Definition of White Uniformity

$$\text{White Uniformity} = \frac{\text{Min. luminance of white among 9-points}}{\text{Max. luminance of white among 9-points}} \times 100\%$$

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.

Page.

A

2016, Jan. 06

16 / 24

5. I/O Terminal

5.1 Pin Assignment (connector part No: MSB24013P20HA or equivalent.)

| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|--|--------|
| 1 | VCC | P | Power Supply +3.3V | |
| 2 | VCC | P | Power Supply +3.3V | |
| 3 | SELB | P | 6bit/8bit mode select | |
| 4 | GND | P | Ground | |
| 5 | RXIN0- | I | Negative LVDS differential data input | |
| 6 | RXIN0+ | I | Positive LVDS differential data input | |
| 7 | GND | P | Ground | |
| 8 | RXIN1- | I | Negative LVDS differential data input | |
| 9 | RXIN1+ | I | Positive LVDS differential data input | |
| 10 | GND | P | Ground | |
| 11 | RXIN2- | I | Negative LVDS differential data input | |
| 12 | RXIN2+ | I | Positive LVDS differential data input | |
| 13 | GND | P | Ground | |
| 14 | CLK- | I | Negative LVDS differential clock input | |
| 15 | CLK+ | I | Positive LVDS differential clock input | |
| 16 | GND | P | Ground | |
| 17 | RXIN3- | I | Negative LVDS differential data input | |
| 18 | RXIN3+ | I | Positive LVDS differential data input | |
| 19 | GND | P | Ground | |
| 20 | GND | P | Ground | |

I: Input, P: Power

Notes:

- 1) NC Pin must be retained; this pin can't contact GND or other signal.
- 2) If LVDS input data is 6 bits ,SELB must be set to High;
If LVDS input data is 8 bits ,SELB must be set to Low.

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.

Page.

A


2016, Jan. 06

17 / 24


5.2 Back Light Unit (Connector Part No: JST:BHSR-02VS-01(N) or equivalent.)

| Pin No. | Symbol | Function | Remark |
|---------|--------|--------------------------------|--------|
| 1 | LEDA | Power Supply for LED backlight | RED |
| 2 | LEDK | GND for LED backlight | BLACK |

5.3 Block Diagram

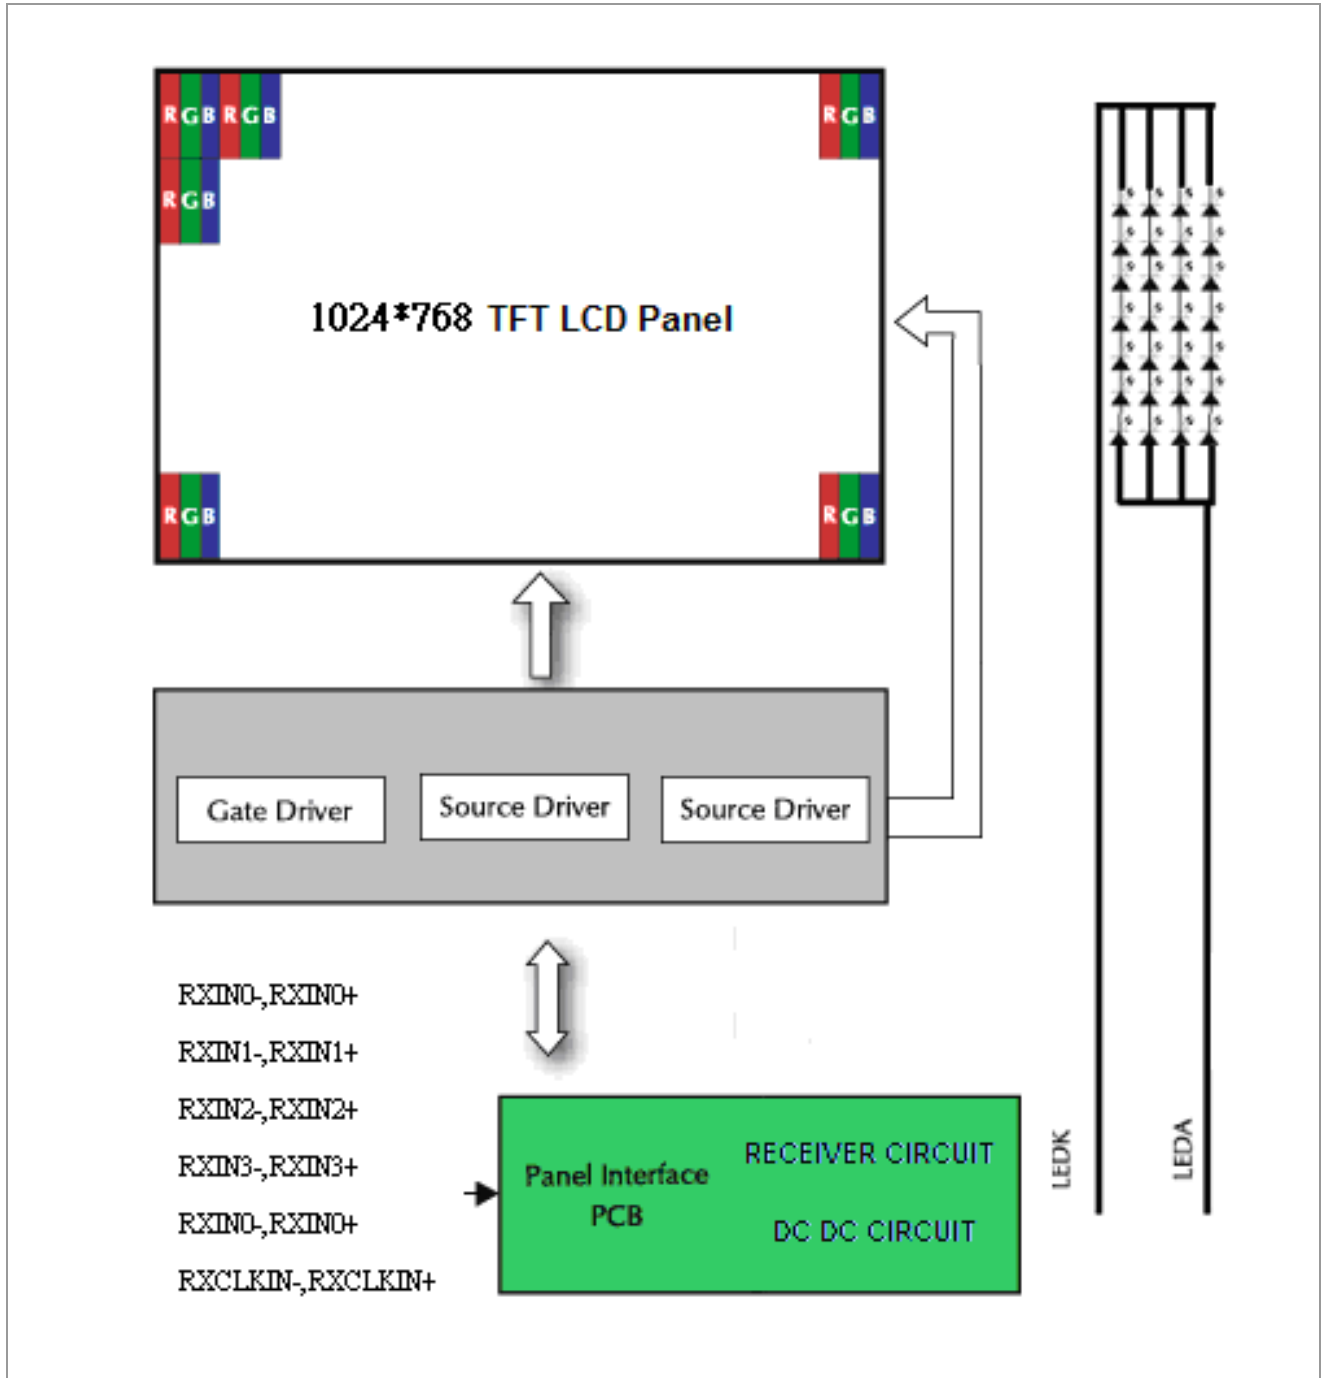

Product Specification

| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 18 / 24 |


6. Displayed Color and Input Data

| | Color & Gray Scale | Data Signal | | | | | | | | | | | | | | | | | |
|-------------|--------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | R5 | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Color | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(0) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(0) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue(0) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| Red | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(62) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(61) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Red(31) | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Red(1) | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Red(0) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Green | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Green(31) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Green(1) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Green(0) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Blue | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue(62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | Blue(61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Blue(31) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Blue(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| Blue(0) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | |

0 : Low level voltage, 1 :High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. With the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

Product Specification

| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 19 / 24 |

7. Reliability Condition


No change on display and in operation under the following test condition.

Condition: Unless otherwise specified, tests will be conducted under the following condition.

Temperature: $20 \pm 5^\circ\text{C}$.

Humidity: $65 \pm 5\% \text{RH}$.


Tests will be not conducted under functioning state.

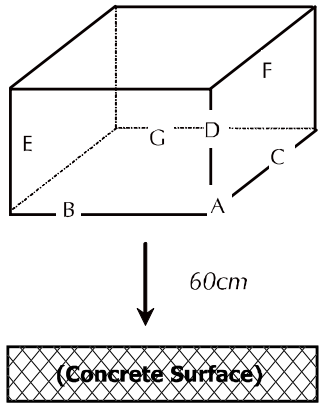
| No. | Parameter | Condition | Notes |
|-----|---|--|-------|
| 1 | High Temperature Operating | $60^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs (Operation state). | |
| 2 | Low Temperature Operating | $-20^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs (Operation state). | 1 |
| 3 | High Temperature Storage | $50^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs. | 2 |
| 4 | Low Temperature Storage | $-10^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs. | 1,2 |
| 5 | High Temperature and High Humidity Operation Test | $4^\circ\text{C} \pm 2^\circ\text{C}$, 90%, 240hrs. | 1,2 |
| 6 | Vibration Test | Total fixed amplitude: 1.5mm. Vibration Frequency: 10~55Hz. One cycle 60 seconds to 3 direction of X, Y, Z each 15 minutes. | 3 |
| 7. | Drop Test | To be measured after dropping from 60cm high on the concrete surface in packing state.  <div style="margin-left: 20px;"> <p><i>Dropping method corner dropping:</i></p> <p><i>A corner: Once edge dropping.</i></p> <p><i>B, C, D edge: Once face dropping.</i></p> <p><i>E, F, G face: Once.</i></p> </div> | |

- Notes:
1. No dew condensation to be observed.
 2. The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.
 3. Vibration test will be conducted to the product itself without putting I in a container.

Product Specification

8. Dimensional Outlines

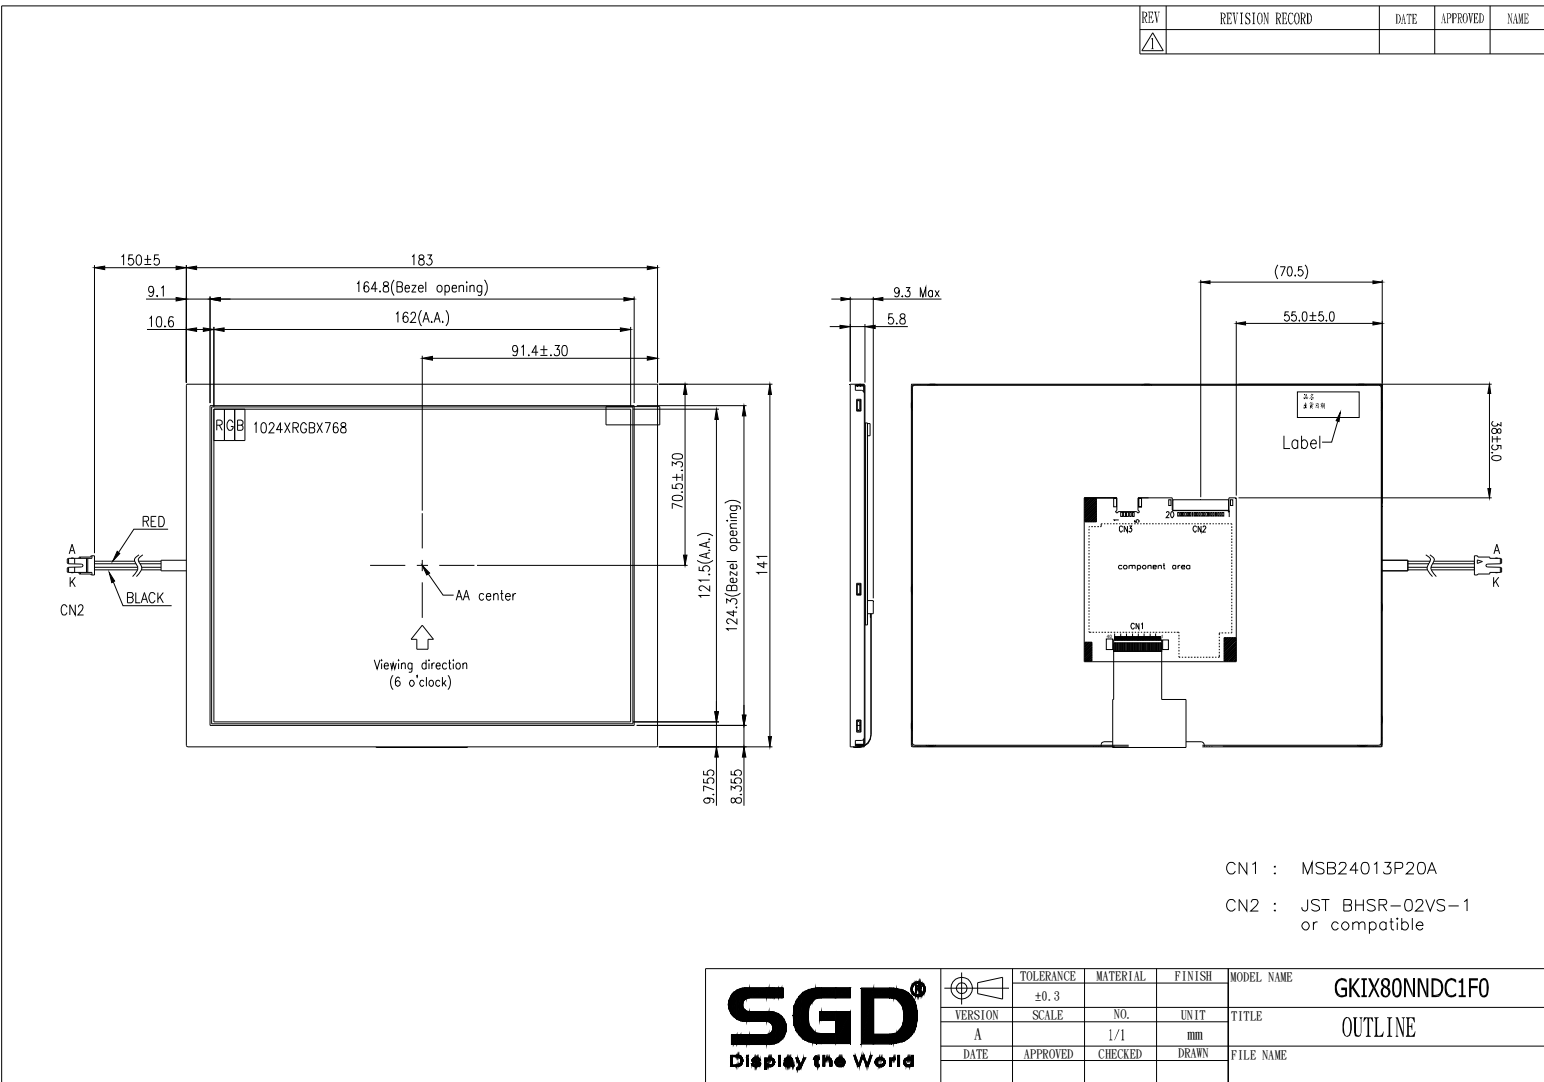


| Product Specification | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 21 / 24 |

9. Incoming Inspection Standards

9.1 Inspection and Environment Conditions

9.1.1 Inspection Conditions:

- (1) Inspection Distance: 35 cm±5cm
- (2) View Angle : Light-on Inspection Angle : ±5°
Cosmetic Inspection Angle : ±45°

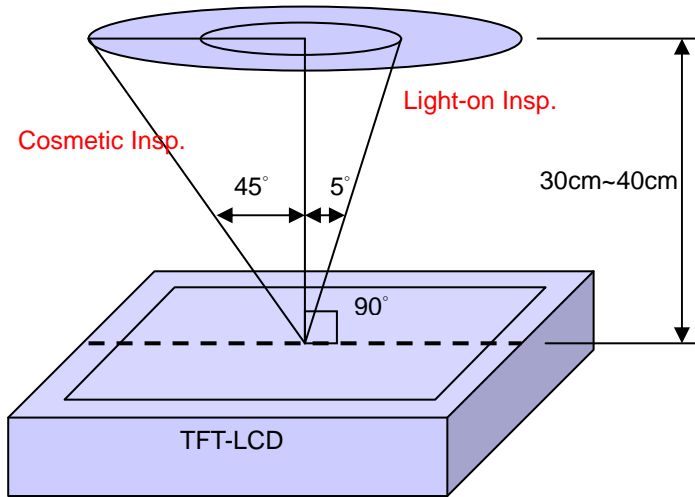

(perpendicular to LCD panel surface)

9.1.2 Environment Conditions:

| | | |
|----------------------|-----------------------|-------------------|
| Ambient Temperature | | 23°C ±5°C |
| Ambient Humidity | | 55±10%RH |
| Ambient Illumination | Cosmetic Inspection | more than 600 Lux |
| | Functional Inspection | 300~500 Lux |


9.1.3 Sampling Conditions:

- (1) Lot Size: Quantity of shipment lot per model
- (2) Sampling Method:

| | | |
|---------------|--------------|------------------------------------|
| Sampling Plan | | MIL-STD-105E |
| | | Normal Inspection, Single Sampling |
| | | Level II |
| AQL | Major Defect | 1.0% |
| | Minor Defect | 1.5% |



- (3) The classification of Major(MA) and Minor(MI) defects is shown as 3. Inspection Criteria.

Product Specification


| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 22 / 24 |

9.1.4 Inspection Criteria

9.1.4.1 Cosmetic Inspection(Panel):
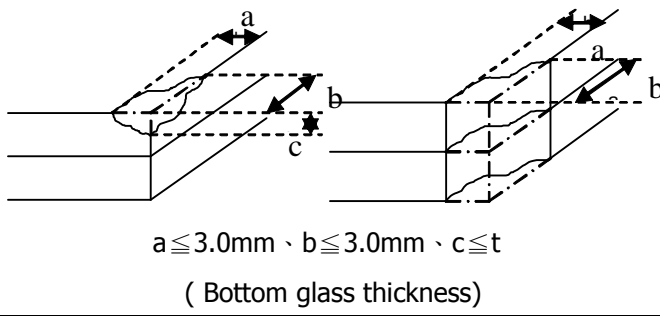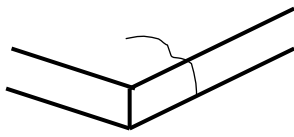
| Item | Judgment Criteria | Classification |
|---------------------------------------|---|----------------|
| Chipping on Panel |  <p style="text-align: center;">$a \leq 3.0\text{mm}$ · $b \leq 3.0\text{mm}$ · $c \leq t$ (Bottom glass thickness)</p> | MA |
| Scratch on Panel *Note-2 | $W \leq 0.05\text{mm}$ or $L < 5\text{mm}$: Ignored $0.05\text{mm} < W \leq 0.1\text{mm}$ and $L \leq 5\text{mm}$: $N \leq 5$ $W > 0.1\text{mm}$ or $L > 5\text{mm}$: Not allowed | MI |
| Bubble or Dent on Panel *Note-3 | $D \leq 0.2\text{mm}$: Ignored $0.2\text{mm} < D \leq 0.3\text{mm}$: $N \leq 5$ $D > 0.3\text{mm}$: Not allowed | MI |
| Panel Crack |  <p style="text-align: center;">Not Allowed crack</p> | MA |
| Bezel Deformation | Obvious deformation is not allowed. | MI |
| Bezel Oxidation | Not allowed if it rusts continuously over 1 cm (It is out of warranty with rusted tin plate) | MI |
| Bezel Scratch | $L \leq 20\text{mm}$, $W \leq 0.2$, $N \leq 3$ | MI |
| Metal Squash Dent /Flange(Front Side) | $D(W) \leq 1, L \leq 3, N \leq 3;$ | MI |
| B/L High Voltage Wire Denudation | Not allowed | MA |
| Polarizer flaw or leak out resin | Defect is defined as the active area. | MI |
| Outline Dimension | Must in Spec, refer to related product spec. | MI |

Product Specification

| | | | | |
|---|----------------------|----------|---------------|---------|
|  | Model: GKIX80NNDC1F0 | Rev. No. | Issued Date. | Page. |
| | | A | 2016, Jan. 06 | 23 / 24 |

9.1.4.2 Functional Inspection:

| Item | Judgment Criteria | | | Classification |
|---|--|--|---------------------|----------------|
| | Area(Note1) | I | O | |
| Point Defect | Bright dot | Random | 2 | |
| | | 2 dots adjacent | 0 | 0 |
| | | 3 dots adjacent or more | 0 | 0 |
| | Dark dot | Random | 3 | |
| | | 2 dots adjacent | 1 | |
| | | 3 dots adjacent or more | 0 | 0 |
| | Total Dot Defect | | 5 | |
| | Distance | Distance between Bright and Bright dot | $L \geq 5\text{mm}$ | |
| | | Distance between Bright and Dark dot | $L \geq 5\text{mm}$ | |
| | | Distance between Dark dot | $L \geq 5\text{mm}$ | |
| (1) It is defined as Point Defect if defect area $> 0.5\text{dot}$ (2) It is ignored if defect area $\leq 0.5\text{dot}$ (3) Weak point defect will be defined as Bright Dot if it can be observed through ND filter 5% (Full Screen Black Inspection) | | | | |
| Line Defect | Obvious vertical or horizontal line defect is not allowed. | | | MA |
| Mura | Not allowed if it can be observed through ND Filter 5 % | | | MI |
| Foreign Material in spot shape *Note-3 | $D \leq 0.2\text{mm}$: Ignored $0.2\text{mm} < D \leq 0.5\text{mm}$: $N \leq 8$ $D > 0.5\text{mm}$: Not allowed | | | MI |
| Foreign Material in line or spiral shape *Note-4 | $W \leq 0.05\text{mm}$ or $L \leq 5\text{mm}$: Ignored $0.05\text{mm} < W \leq 0.2\text{mm}$ and $L 1.0\text{mm} \leq 5\text{mm}$: $N \leq 8$ $W > 0.2\text{mm}$ or $L > 5\text{mm}$: Not allowed | | | MI |
| Display Function Abnormal | No Malfunction can be allowed | | | MA |

Product Specification



Model: GKIX80NNDC1F0

Rev. No.

Issued Date.


Page.

A


2016, Jan. 06

24 / 24


Note-1 : I/O Area Definition

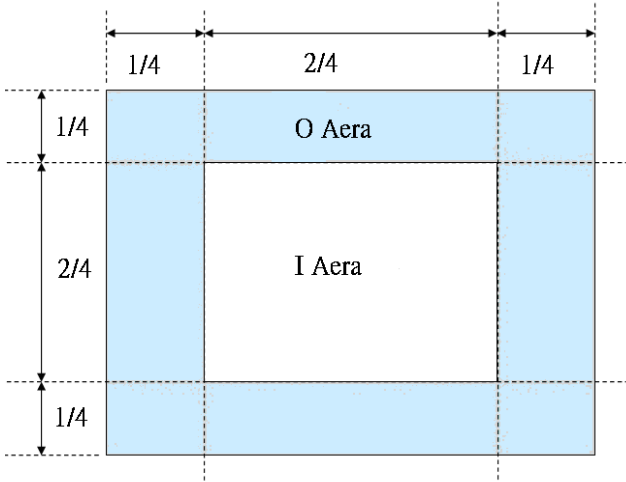


Note-2 : Polarizer Scratch

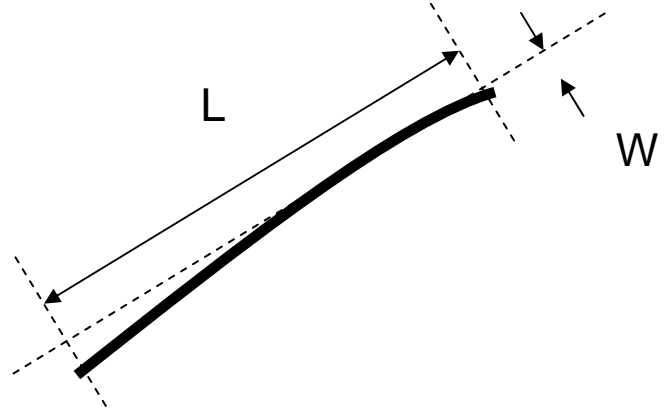

Note-3 : Spot Foreign Material
($W \geq L / 4$)

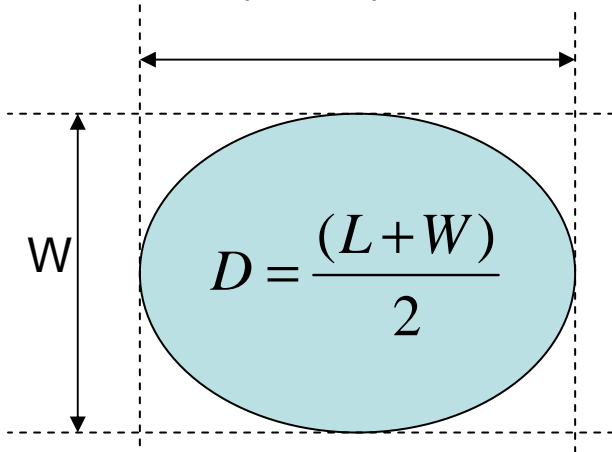

Note-4 : Line or Spiral Foreign Material
($W < L / 4$)

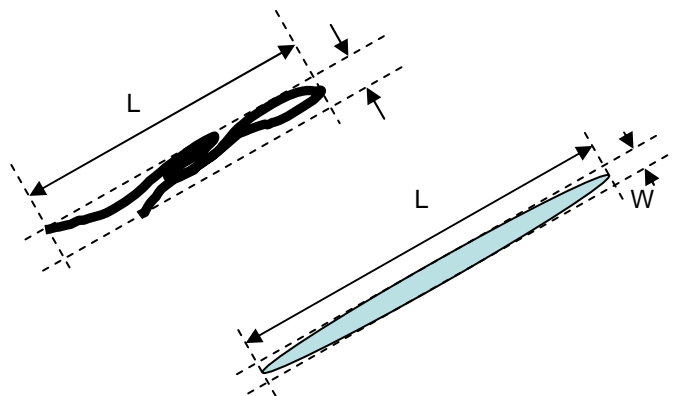

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG

Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com