


Product Specification




	Model: GKIF70MNID1A0	Rev. No.	Issued Date.	Page.
		A	2018 .Aug. 14	1 / 21

Thin-Film-Transistor LCD Module
Model: GKIF70MNID1A0


Acceptance

Solomon Goldentek Display Corp.
NO. 18 Ta-Yeh St., Ta-Fa Industrial Park, Ta-Liao
Hsiang, Kaohsiung Hsien 831, TAIWAN , R.O.C.
FAX: 886-7-7886800

Approved and Checked by

Approved by	Checked by		Made by
			

Product Specification


	Model: GKIF70MNID1A0	Rev. No.	Issued Date.	Page.
		A	2018 .Aug. 14	2 / 21

Revise Records

Rev.	Date	Contents	Written	Approved
A	2018/8/14	Preliminary Specification	Kolos Wu	Carl Lin

Special Notes

Note1.	
Note2.	
Note3.	
Note4.	
Note5.	

Product Specification				
	Model: GKIF70MNID1A0	Rev. No.	Issued Date.	Page.
		A	2018 .Aug. 14	3 / 21

Contents

1.	General Description and Features	4
1.1	Features	4
1.2	LCD Module	4
2.	Mechanical Information	4
3.	Electrical Specifications	5
3.1	Absolute Max. Ratings	5
3.2	AC Timing Characteristic of The LCD	6
3.3	LVDS Switching Characteristics	7
4.	Optical Characteristics	9
4.1	Optical characteristic of the LCD	9
5.	I/O Terminal	12
5.1	Pin Assignment (connector part No: MSB24013P20A or equivalent.)	12
5.2	Block Diagram	14
6.	Displayed Color and Input Data	15
7.	Reliability Condition	16
8.	Dimensional Outlines	17

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14

4 / 21

1. General Description and Features

GKIF70MNID1A0 is a transmissive type color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT-LCD module, a receiver circuit and a back-light unit. Graphics and texts can be displayed on a WVGA 1024 (H) x RGB x 600 (V) dots (16:10 aspect ratio) with 262,144/16.2M colors. The following table described the features of GKIF70MNID1A0.

1.1 Features

- Transmissive and back-light with 36 LEDs are available.
- IPS mode.
- LVDS Receiver 6bit/8bit Interface.
- RoHS Compliance
- IIS: T070WHN01

1.2 LCD Module

Item	Specification	Unit
Screen Size	7.0 inches	Diagonal
Display Resolution	1024 (H) x 600 (V)	Pixel
Active Area	154.21 (H) x 85.92 (V)	mm
Outline Dimension	164.9 (H) x 100 (V) x 3.5 (T)	mm
Display Mode	Normally Black	--
Pixel Arrangement	R,G,B Vertical Stripe	--
Pixel Size	0.1506 x 0.1432	mm
Surface Treatment	Anti-Glare and Hard Coating(3H)	
Display Color	262k/16.2M	--
Viewing Direction	Full View	--
Input Interface	LVDS Receiver 6bit/8bit Interface	--

2. Mechanical Information

Item	Min.	Typ.	Max.	Unit	Note	
Module Size	Horizontal (H)	164.6	164.9	165.2	mm	
	Vertical (V)	99.7	100	100.3	mm	
	Thickness (T)	3.2	3.5	3.8	mm	(1)
Weight	--	(TBD)	--	g	--	

Note (1) Not Include Component. Refer to the Outline Dimension Drawing as attached.

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14

5 / 21

3. Electrical Specifications

3.1 Absolute Max. Ratings

3.1.1 Absolute Ratings of Environment

If the operating condition exceeds the following absolute maximum ratings, the TFT LCD module may be damaged permanently.

($T_a=25\pm 2^\circ\text{C}$, $V_{SS}=\text{GND}=0$)

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T_{STG}	-30	80	$^\circ\text{C}$	(1)
Operating temperature	T_{OPR}	-20	70	$^\circ\text{C}$	(1,2,3)

Note (1) 95 % RH Max. ($40^\circ\text{C} \geq T_a$). Maximum wet-bulb temperature at 39°C or less. ($T_a > 40^\circ\text{C}$) No condensation.

Note (2) In case of below 0° , the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one. Level of retardation depends on temperature, because of LC's character

Note (3) Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at $+25^\circ\text{C}$.

3.1.2 Electrical Absolute Maximum Ratings

($V_{SS}=\text{GND}=0$)

Parameter	Symbol	Min.	Max.	Unit	Remark
Power supply voltage	V_{CC}	-0.3	4.0	V	
input voltage	V_I	-0.3	$V_{CC}+0.3$	V	--
Power supply voltage for LED driver	V_{LED}	6	36	V	

Note: (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under normal operating conditions.

(2) $T_a = 25\pm 2^\circ\text{C}$

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14

6 / 21

3.1.3 DC Electrical Characteristics of the LCM

(Ta=25±2°C, V_{SS}=GND=0)

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply	VCC	3.0	3.3	3.6	V	
Input Voltage for logic	Differential Input High Threshold VTH			+100	Mv	
	Differential Input Low Threshold VTL	-100			mv	
Power Supply current for TFT driving circuit	ICC	-	(TBD)	(TBD)	mA	Note (1)
Power Supply current for LED driver circuit	I _{LED}	-	300	330	mA	V _{LED} =5V
LED Life time	-	30000	-	-	hr	Note (3)

Note : (1) fv =60Hz , Ta=25°C , Display pattern : Black pattern

(2) LEDs in 3 series x 12 parallel type.

(3) The environmental conducted under ambient air flow ,at Ta=25±2°C, 60%RH±5%



3.2 AC Timing Characteristic of The LCD

3.2.1 Timing Condition (DE only mode)

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
DCLK frequency	Fclk	40.8	51.2	67.2	MHz	
Horizontal Display Area	thd	1024			DCLK	
HSD Period	th	1114	1344	1400	DCLK	
HSD Blanking	thb + thfp	90	320	376	DCLK	
Vertical Display Area	tvd	600			T _H	
VSD Period	tv	610	635	800	T _H	
VSD Blanking	tvbp + tvfp	10	35	200	T _H	

Product Specification



Model: GKIF70MNIID1A0

Rev. No.

Issued Date.

Page.


A

2018 .Aug. 14

7 / 21

3.2.2 Timing Characteristic

3.2.2.1 Clock and Data input waveforms

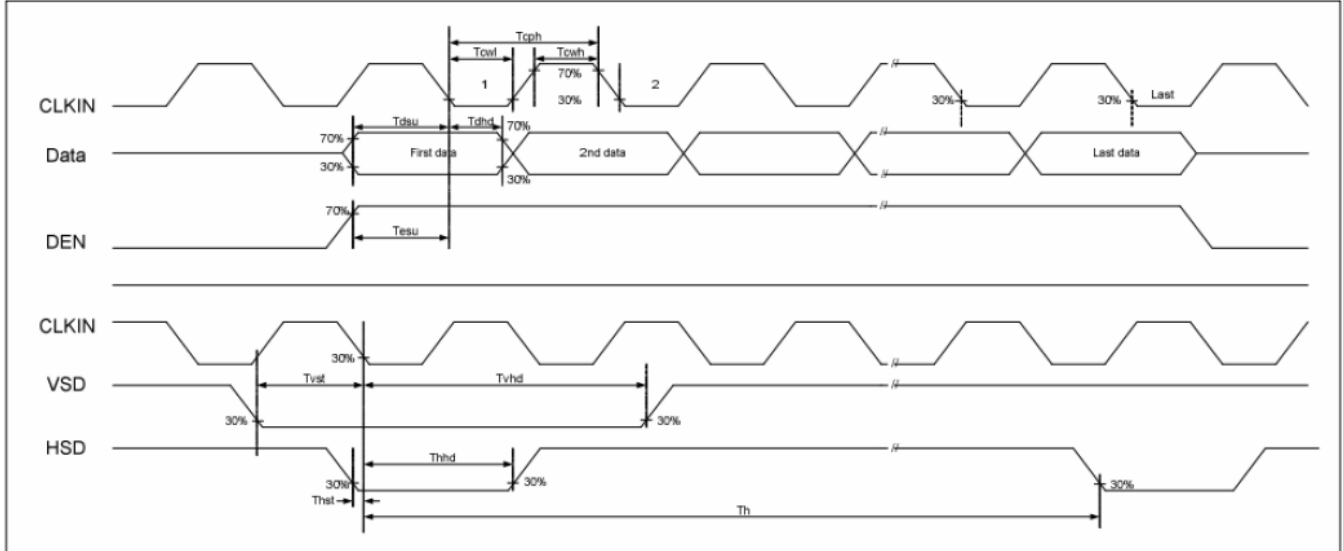

3.3 LVDS Switching Characteristics

3.3.1 LVDS Timing Condition

Symbol	Parameter	Min.	Typ.	Max.	Unit.	Note	
tRCP	CLK OUT Period	VCC = 3.0 - 3.6V	11.76	T	50.0	ns	
		VCC = 2.5 - 3.6V	14.28	T	50.0	ns	
tRCH	CLK OUT High Time	-	4T/7	-	ns		
tRCL	CLK OUT Low Time	-	3T/7	-	ns		
tRCD	RCLK +/- to CLK OUT Delay	-	5T/7	-	ns		
tRS	TTL Data Setup to CLK OUT	0.35T-0.3	-	-	ns		
tRH	TTL Data Hold from CLK OUT	0.45T-1.6	-	-	ns		
tTLH	TTL Low to High Transition Time	-	2.0	3.0	ns		
tTHL	TTL High to Low Transition Time	-	1.8	3.0	ns		
tRIP1	Input Data Position0 (T = 11.76ns)	-0.4	0.0	0.4	ns		
tRIP0	Input Data Position1 (T = 11.76ns)	T/7-0.4	T/7	T/7+0.4	ns		
tRIP6	Input Data Position2 (T = 11.76ns)	2T/7-0.4	2T/7	2T/7+0.4	ns		
tRIP5	Input Data Position3 (T = 11.76ns)	3T/7-0.4	3T/7	3T/7+0.4	ns		
tRIP4	Input Data Position4 (T = 11.76ns)	4T/7-0.4	4T/7	4T/7+0.4	ns		
tRIP3	Input Data Position5 (T = 11.76ns)	5T/7-0.4	5T/7	5T/7+0.4	ns		
tRIP2	Input Data Position6 (T = 11.76ns)	6T/7-0.4	6T/7	6T/7+0.4	ns		
tRPLL	Phase Lock Loop Set			10.0	ms		

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.


Page.

A


2018 .Aug. 14

8 / 21

3.3.2 LVDS AC Timing

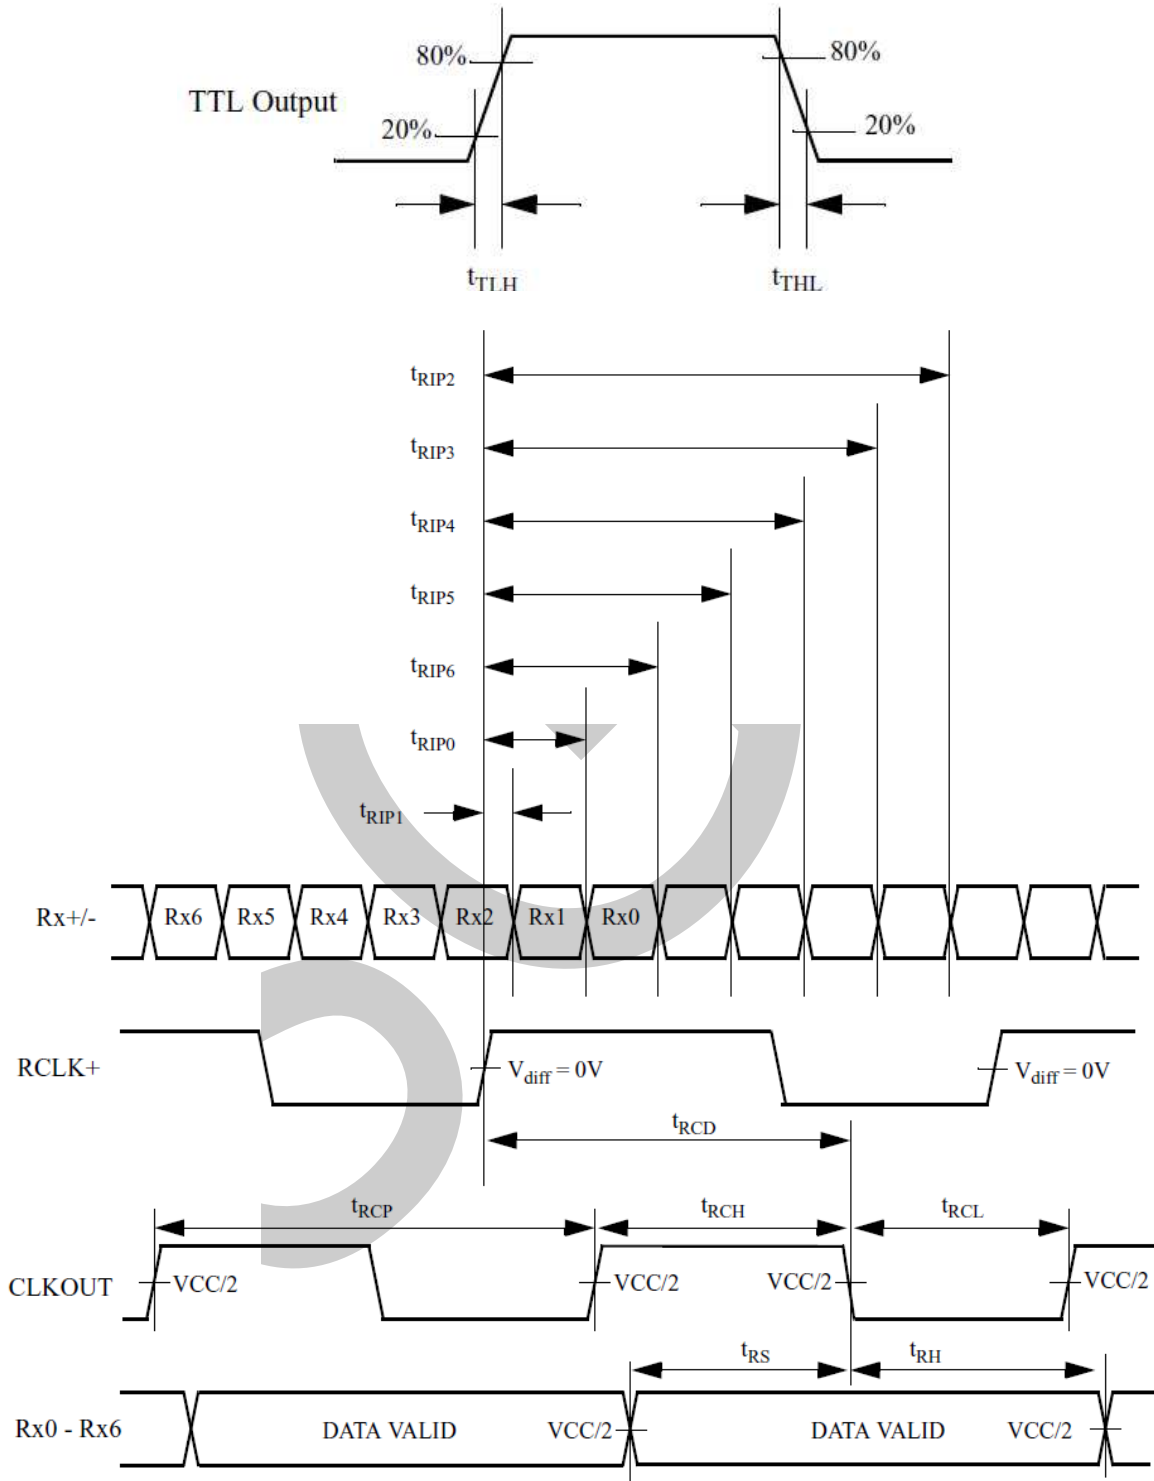

Product Specification

	Model: GKIF70MNID1A0	Rev. No.	Issued Date.	Page.
		A	2018 .Aug. 14	9 / 21

4. Optical Characteristics

4.1 Optical characteristic of the LCD

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods.

Measuring equipment: BM-7A

Item	Symbol	Condition	Min	Type	Max	Unit	Note
Brightness	B		(900)	(1000)	--	cd/m ²	
Response time	T _r + T _f	θ=0°	--	30	50	ms	.
Contrast ratio	CR	At optimized viewing angle	(600)	(800)	--	--	
Luminance Uniformity	ΔL		70	80	-	%	
Color Chromaticity (CIE 1931)	White	W _x	(0.289)	(0.339)	(0.389)	--	BM-7A
		W _y	(0.353)	(0.403)	(0.453)		
Viewing Angle	Hor.	θ _R	80	85	--	Degree	
		θ _L	80	85	--		
	Ver.	θ _U	80	85	--		
		θ _D	80	85	--		

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14


10 / 21

a. Test equipment setup

After stabilizing and leaving the panel alone shall be warmed up for the stable operation of LCM, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7(fast) with a viewing angle of 2° at a distance of 50cm and normal direction.

b. Definition of response time: Tr and Tf

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

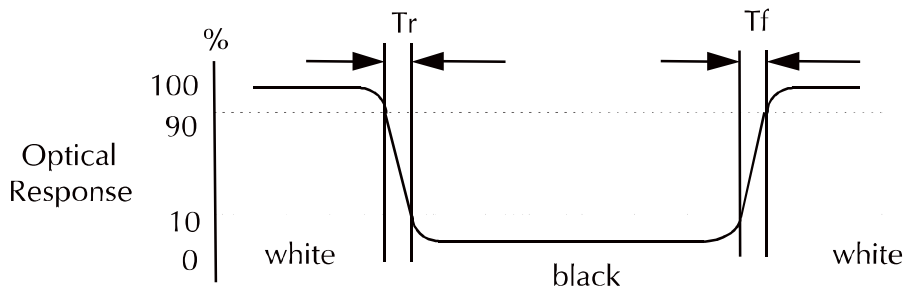

c. Definition of contrast ratio:

$$\text{Contrast Ratio (CR)} = \frac{\text{Brightness measured when LCD is at "white state"}}{\text{Brightness measured when LCD is at "black state"}}$$

d. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.


Page.

A

2018 .Aug. 14

11 / 21

e. View Angle

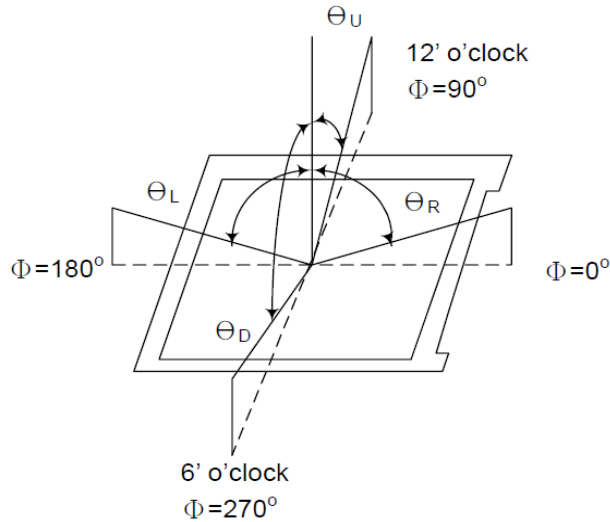

f. Definition of Luminance of White: Luminance of white at the center points

Light Source of Back-Light Unit	LED Type
---------------------------------	----------


g. Definition of White Uniformity

$$\text{White Uniformity} = \frac{\text{Min. luminance of white among 9-points}}{\text{Max. luminance of white among 9-points}} \times 100\%$$

h. The definition of Color Gamut -Color Chromaticity CIE 1931

Color coordinate of white & red, green, blue at center point.

Color Gamut : NTSC(%) = (RGB Triangle Area / NTSC Triangle Area) x 100

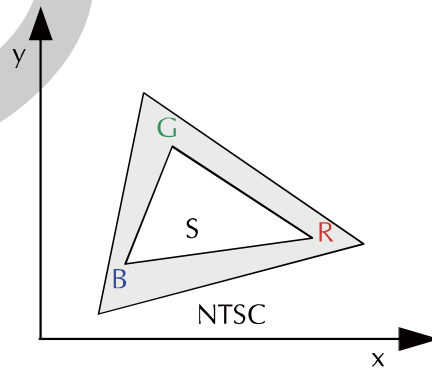

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14

12 / 21

5. I/O Terminal

5.1 Pin Assignment (connector part No: MSB24013P20A or equivalent.)

Pin No.	Symbol	I/O	Function	Remark
1	VCC	P	Power Supply +3.3V	
2	VCC	P	Power Supply +3.3V	
3	SELB	I	6bit/8bit mode select	Note
4	GND	P	Ground	
5	IND0-	I	Negative LVDS differential data input	
6	IND0+	I	Positive LVDS differential data input	
7	GND	P	Ground	
8	IND1-	I	Negative LVDS differential data input	
9	IND1+	I	Positive LVDS differential data input	
10	GND	P	Ground	
11	IND2-	I	Negative LVDS differential data input	
12	IND2+	I	Positive LVDS differential data input	
13	GND	P	Ground	
14	NINCLK-	I	Negative LVDS differential clock input	
15	PINCLK+	I	Positive LVDS differential clock input	
16	GND	P	Ground	
17	IND3-	I	Negative LVDS differential data input	
18	IND3+	I	Positive LVDS differential data input	
19	GND	P	Brightness control for LED B/L	
20	GND	P	Ground	

I: Input, P: Power

Notes:

- 1) When use 6bit input mode : SELB=VDD ; When use 8bit input mode : SELB=GND

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14


13 / 21

5.2 Back-light (CN3:3808K-F05N-03L or Equivalent)

Pin No.	Symbol	I/O	Function	Remark
1	VLED	P	Power Supply +12V	
2	GND	P	Ground	
3	ON/OFF	I	Backlight ON/OFF control	
4	PWM	I	Backlight Dimming control	
5	GND	P	Ground	

Notes:

- 1) User's connector: or Equivalent.

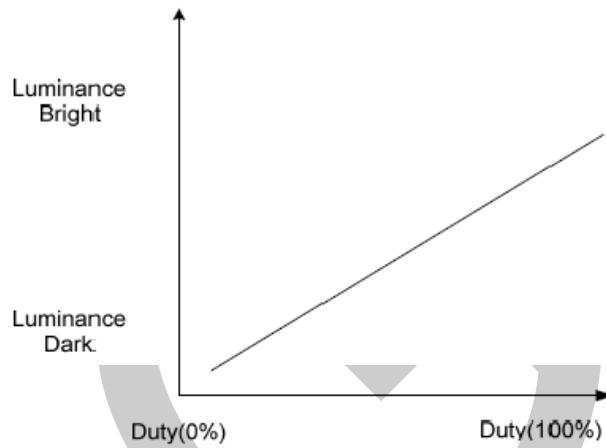

- 2) ADJ signal = 0.3~1.5V , Operating frequency :100Hz~20KHz

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.


Page.

A

2018 .Aug. 14

14 / 21

5.3 Block Diagram

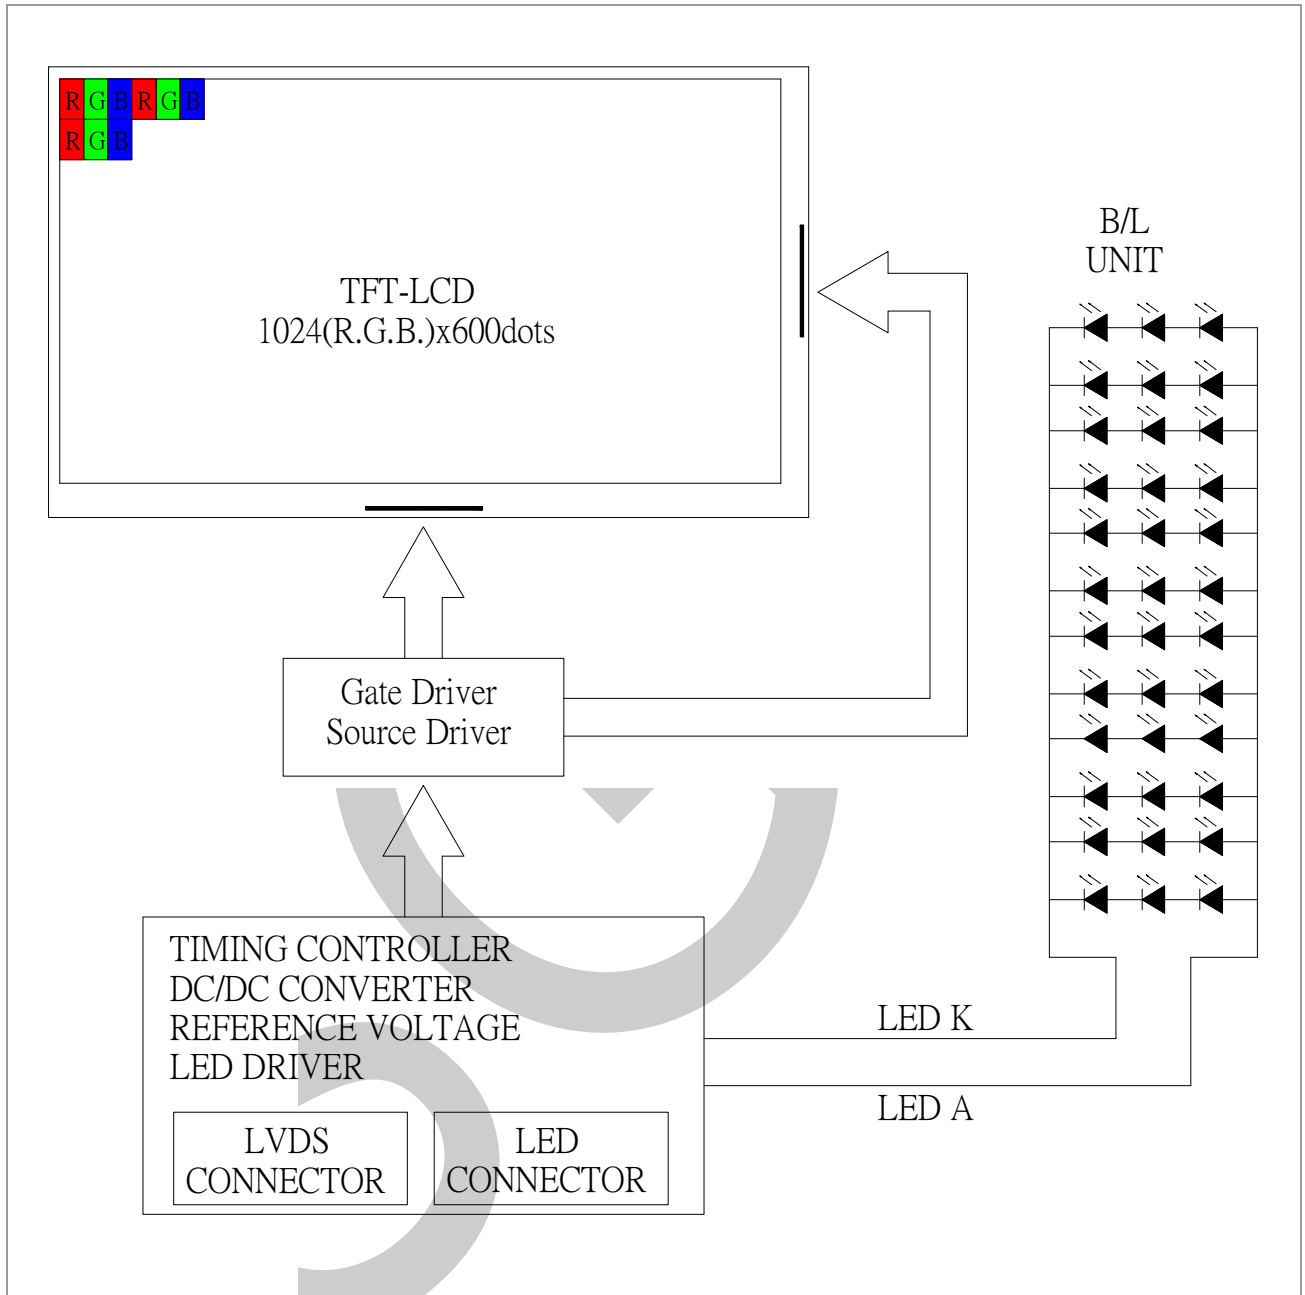

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14

15 / 21

6. Displayed Color and Input Data

	Color & Gray Scale	Data Signal																	
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green(0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue(0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(62)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(61)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(31)	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(1)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Red(0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Green(61)	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(31)	0	0	0	0	0	0	0	1	1	1	1	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(1)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
Green(0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(31)	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
Blue(0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	

0 : Low level voltage, 1 :High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. With the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14

16 / 21

7. Reliability Condition


No change on display and in operation under the following test condition.

Condition: Unless otherwise specified, tests will be conducted under the following condition.

Temperature: $20 \pm 5^\circ\text{C}$.

Humidity: $65 \pm 5\% \text{RH}$.

Tests will be not conducted under functioning state.

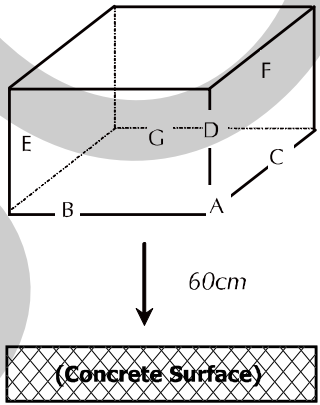No.	Parameter	Condition	Notes
1	High Temperature Operating	$70^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs (Operation state).	
2	Low Temperature Operating	$-20^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs (Operation state).	1
3	High Temperature Storage	$80^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs.	2
4	Low Temperature Storage	$-30^\circ\text{C} \pm 2^\circ\text{C}$, 240hrs.	1,2
5	High Temperature and High Humidity Operation Test	$60^\circ\text{C} \pm 2^\circ\text{C}$, 90%, 240hrs.	1,2
6	Vibration Test	Total fixed amplitude: 1.5mm. Vibration Frequency: 10~55Hz. One cycle 60 seconds to 3 direction of X, Y, Z each 15 minutes.	3
7.	Drop Test	To be measured after dropping from 60cm high on the concrete surface in packing state.  <i>Dropping method corner dropping:</i> <i>A corner: Once edge dropping.</i> <i>B, C, D edge: Once face dropping.</i> <i>E, F, G face: Once.</i>	

- Notes:
1. No dew condensation to be observed.
 2. The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.
 3. Vibration test will be conducted to the product itself without putting I in a container.


Product Specification



Model: GKIF70MNID1A0

Rev. No.	Issued Date.	Page.
A	2018 .Aug. 14	17 / 21

8. Dimensional Outlines

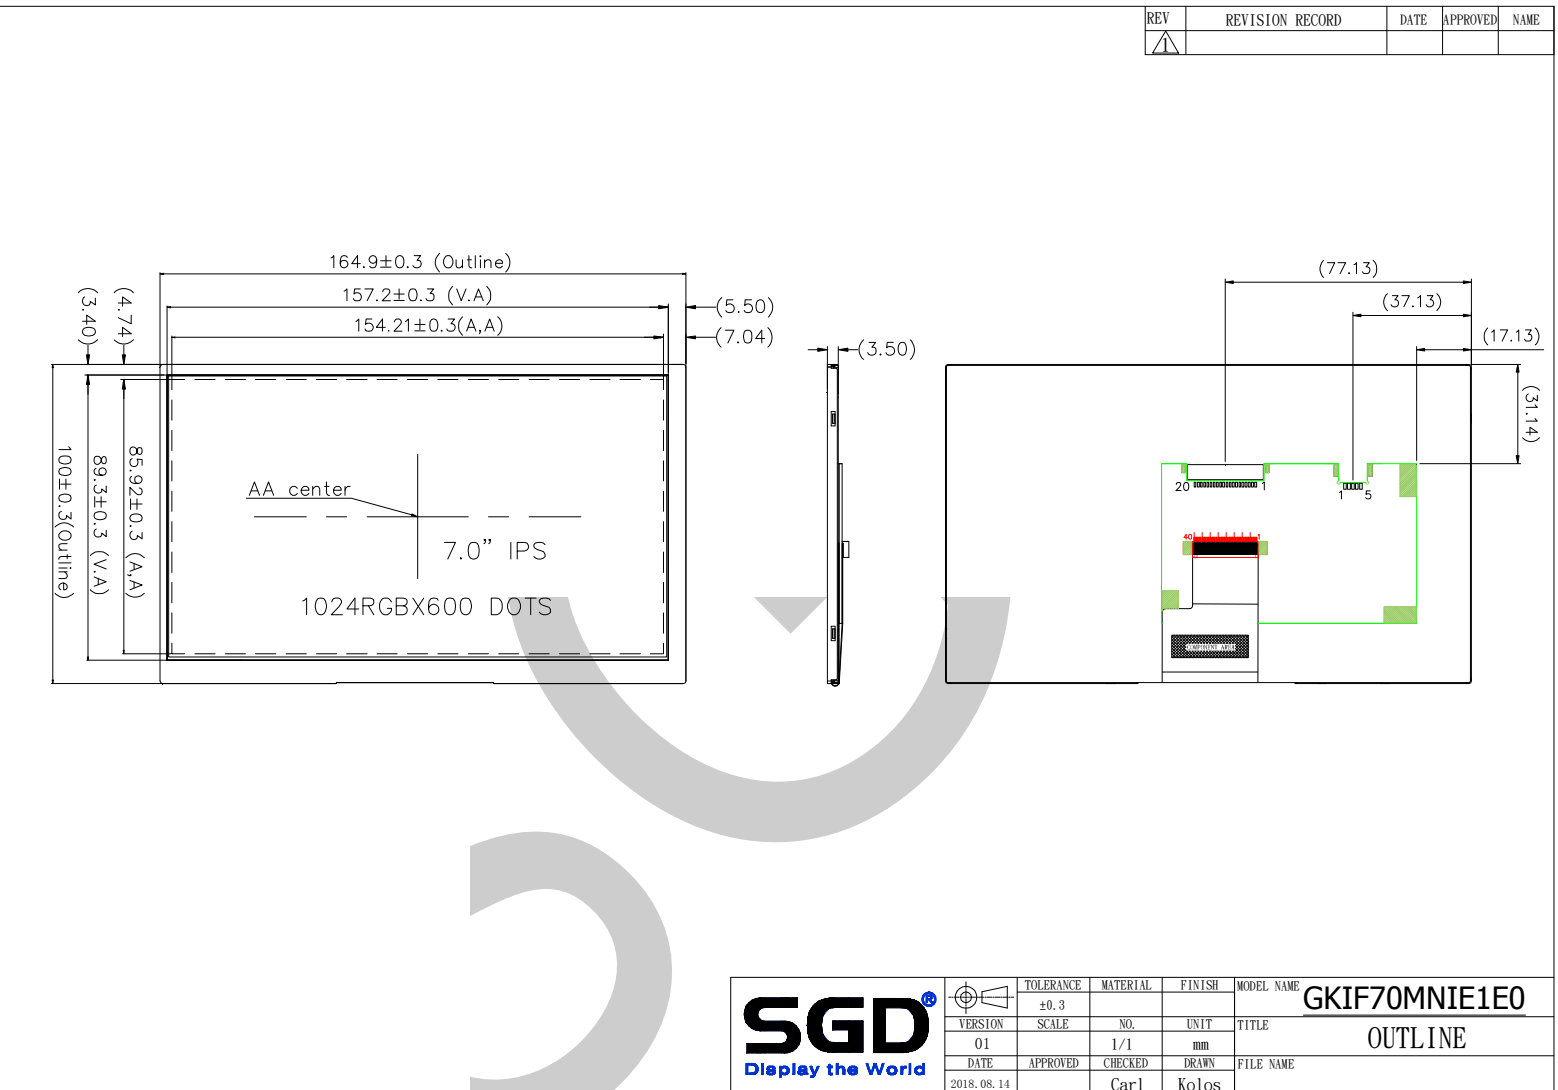

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14


18 / 21

9. Incoming Inspection Standards

9.1 Inspection and Environment Conditions

9.1.1 Inspection Conditions:

- (1) Inspection Distance: 35 cm \pm 5cm
- (2) View Angle: Light-on Inspection Angle : $\pm 5^\circ$
Cosmetic Inspection Angle : $\pm 45^\circ$

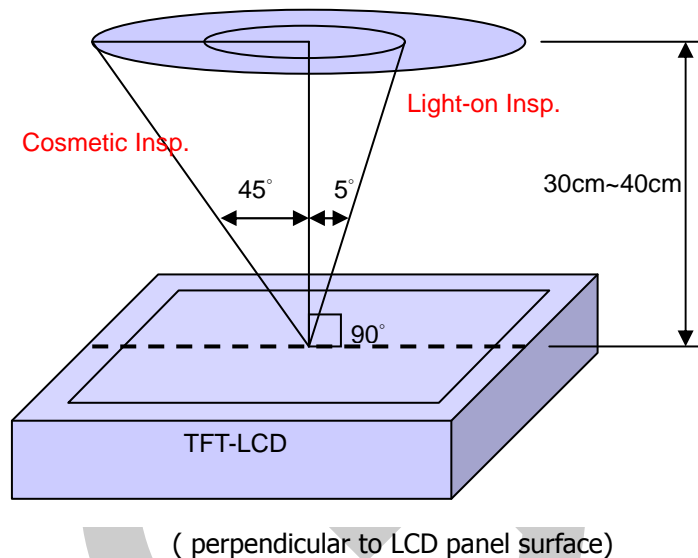

9.1.2 Environment Conditions:

Ambient Temperature		23°C \pm 5°C
Ambient Humidity		55 \pm 10%RH
Ambient Illumination	Cosmetic Inspection	more than 600 Lux
	Functional Inspection	300~500 Lux

9.1.3 Sampling Conditions:

- (1) Lot Size: Quantity of shipment lot per model
- (2) Sampling Method:

Sampling Plan		MIL-STD-105E
		Normal Inspection, Single Sampling
		Level II
AQL	Major Defect	1.0%
	Minor Defect	1.5%

- (3) The classification of Major(MA) and Minor(MI) defects is shown as 3. Inspection Criteria.

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.



A

2018 .Aug. 14

19 / 21

9.1.4 Inspection Criteria

9.1.4.1 Cosmetic Inspection(Panel):

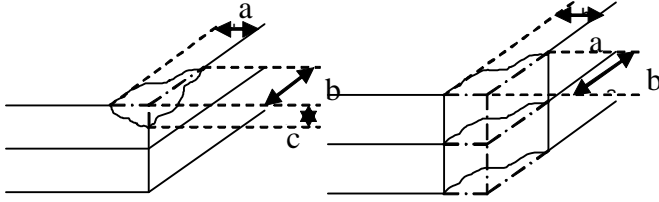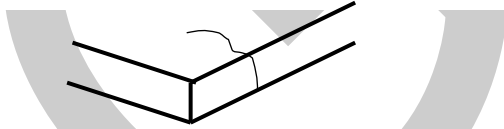Item	Judgment Criteria	Classification
Chipping on Panel	 <p>$a \leq 3.0\text{mm}$、$b \leq 3.0\text{mm}$、$c \leq t$ (Bottom glass thickness)</p>	MA
Scratch on Panel *Note-2	<p>1.BM: Ignored 2.Pixel area $W \leq 0.05\text{mm}$ or $L < 5\text{mm}$: Ignored $0.05\text{mm} < W \leq 0.1\text{mm}$ and $L \leq 5\text{mm}$: $N \leq 5$ $W > 0.1\text{mm}$ or $L > 5\text{mm}$: Not allowed</p>	MI
Bubble or Dent on Panel/Touch Panel *Note-3	<p>1.BM: Ignored 2.Pixel area $D \leq 0.2\text{mm}$: Ignored $0.2\text{mm} < D \leq 0.3\text{mm}$: $N \leq 5$ $D > 0.3\text{mm}$: Not allowed</p>	MI
Panel Crack	 <p>Not Allowed crack</p>	MA
Bezel Deformation	Obvious deformation is not allowed.	MI
Bezel Oxidation	Not allowed if it rusts continuously over 1 cm (It is out of warranty with rusted tin plate)	MI
Bezel Scratch	$L \leq 20\text{mm}$, $W \leq 0.2$, $N \leq 3$	MI
Metal squash Dent /Flange(Front Side)	$D(W) \leq 1, L \leq 3, N \leq 3;$	MI
B/L High Voltage Wire Denudation	Not allowed	MA
Polarizer flaw or leak out resin	Defect is defined as the active area.	MI
Outline Dimension	Must in Spec, refer to related product spec.	MI

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.

Page.

A

2018 .Aug. 14

20 / 21

9.1.4.2 Functional Inspection:

Item	Judgment Criteria			Classification
	Area(Note1)	I	O	
Point Defect	Bright dot	Random	2	
		2 dots adjacent	0	0
		3 dots adjacent or more	0	0
	Dark dot	Random	3	
		2 dots adjacent	1	
		3 dots adjacent or more	0	0
	Total Dot Defect		5	
	Distance	Distance between Bright and Bright dot	$L \geq 5\text{mm}$	
		Distance between Bright and Dark dot	$L \geq 5\text{mm}$	
		Distance between Dark dot	$L \geq 5\text{mm}$	
(1) It is defined as Point Defect if defect area $> 0.5\text{dot}$ (2) It is ignored if defect area $\leq 0.5\text{dot}$ (3) Weak point defect will be defined as Bright Dot if it can be observed through ND filter 6% (Full Screen Black Inspection)				
Line Defect	Obvious vertical or horizontal line defect is not allowed.			MA
Mura	Not allowed if it can be observed through ND Filter 6 %			MI
Foreign Material in spot shape *Note-3	Visible under : ND6% $D \leq 0.2\text{mm}$: Ignored $0.2\text{mm} < D \leq 0.5\text{mm}$: $N \leq 5$ $D > 0.5\text{mm}$: Not allowed			MI
Foreign Material in line or spiral shape *Note-4	Visible under : ND6% $W \leq 0.05\text{mm}$ or $L \leq 6.0\text{mm}$: Ignored $0.05\text{mm} < W \leq 0.5\text{mm}$ and $L \leq 6.0\text{mm}$: $N \leq 5$ $W > 0.5\text{mm}$ or $L > 6.0\text{mm}$: Not allowed			MI
Display Function Abnormal	No Malfunction can be allowed			MA

Product Specification



Model: GKIF70MNID1A0

Rev. No.

Issued Date.


Page.

A


2018 .Aug. 14

21 / 21


Note-1 : I/O Area Definition

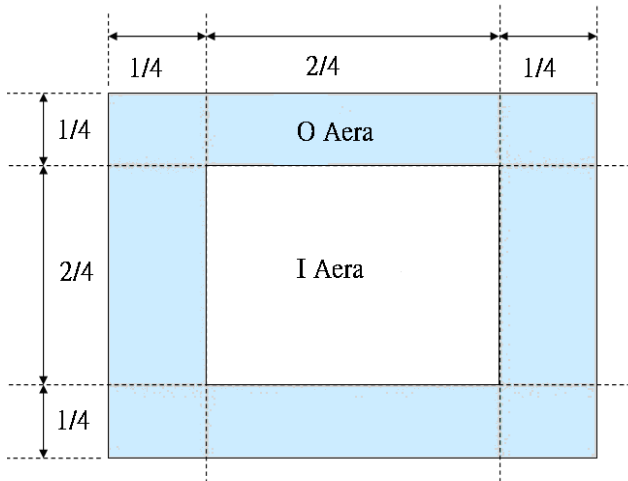

Note-2 : Polarizer Scratch

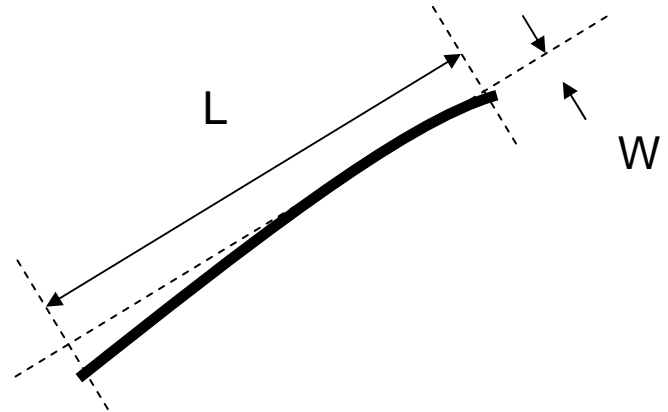

Note-3 : Spot Foreign Material
($W \geq L / 4$)

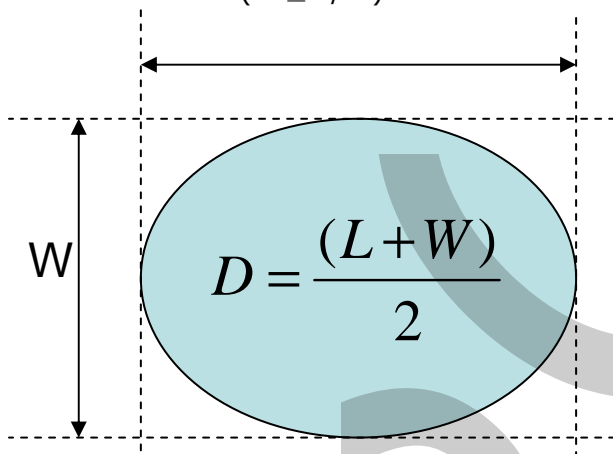

Note-4 : Line or Spiral Foreign Material
($W < L / 4$)

